

9-18-00

A



PATENT

Docket No. 1232-4647

Express Mail Label No. EL020890972U



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

**UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))**

COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and

Address(es): Hideo KAWAHARA, 10-7, Honcho 3-chome, Hatogaya-shi, Saitama-ken, Japan

For:

IMAGE SENSING APPARATUS, METHOD OF CONTROLLING IMAGE  
SENSING APPARATUS AND IMAGE RECORDING APPARATUS, AND  
METHOD OF DESIGNING OPTICAL SYSTEM

Enclosed are:

☒ 47 page(s) of specification, 1 page(s) of Abstract, 17 page(s) of claims

☒ 18 sheets of drawing ☒ formal ☐ informal

☐ Page(s) of Declaration and Power of Attorney

☐ Unsigned

☐ Newly Executed

☐ Copy from prior application

☐ Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

☒ Incorporation by Reference: The entire disclosure of the priority application(s) identified below, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.

☐ Microfiche Computer Program (Appendix)

☐ page(s) of Sequence Listing

☐ computer readable disk containing Sequence Listing

☐ Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

☒ Claim for Priority Japanese Application No 11-265779 filed 9/20/00

- ☐ Certified copy of Priority Document(s)
- ☐ English translation documents
- ☐ Information Disclosure Statement
- ☐ Copy of 1 Cited reference
- ☐ Copy of PTO-1449 filed in parent application serial No. \_\_\_\_\_
- ☐ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ A check in the amount of \$40.00 for recording the Assignment.
- ☐ Assignment papers filed in parent application Serial No. \_\_\_\_\_
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no. \_\_\_\_\_
- ☐ Cancel in this application original claims \_\_\_\_\_ of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until \_\_\_\_\_
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:  
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No. \_\_\_\_\_ filed \_\_\_\_\_.

## I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

	Number Filed		Number Extra	Rate	Basic Fee
					\$ 690.00
Total Claims	45	-20=	25	x\$18.00	\$ 450.00
Independent Claims	20	- 3=	17	x78.00	\$ 1,326 00
Multiple Dependent Claims	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no				Additional Fee = Add'l Fee = 260.00
				NONE	\$ 0

Total: \$2,466.00

- ☐ A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ \_\_\_\_\_.
- ☒ A check in the amount of \$2,466.00 for payment of the application filing fees is attached.
- ☐ Charge Fee(s) to Deposit Account No. 13-4500. Order No. \_\_\_\_\_. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- ☒ The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1232-4646. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN &amp; FINNEGAN, L.L.P.

By: Michael M. Murray  
Registration No 32,537Dated: September 15, 2000

CORRESPONDENCE ADDRESS  
 MORGAN & FINNEGAN, L.L.P.  
 345 Park Avenue  
 New York, New York 10154  
 (212) 758-4800  
 (212) 751-6849 Facsimile

TITLE OF THE INVENTION

IMAGE SENSING APPARATUS, METHOD OF CONTROLLING IMAGE  
SENSING APPARATUS AND IMAGE RECORDING APPARATUS, AND  
METHOD OF DESIGNING OPTICAL SYSTEM

5

FIELD OF THE INVENTION

The present invention relates to an image sensing  
apparatus, method of controlling an image sensing  
apparatus and an image recording apparatus, and a  
10 method of designing an optical system used and, more  
particularly, to an image sensing apparatus, method of  
controlling an image sensing apparatus and an image  
recording apparatus, and a method of designing an  
optical system when a multi-pixel image sensing element  
15 is used.

BACKGROUND OF THE INVENTION

Conventionally, image sensing apparatuses which  
can record both still images and moving images have  
20 been proposed. For example, an image sensing apparatus  
that integrates a video camera and tape recorder, and  
can record a moving image and still image on a single  
tape, and an image sensing apparatus which records a  
moving image on a tape and records a still image on  
25 another recording medium such as memory, are known.

096341-0460

In recent image sensing apparatuses, an image sensing element has a larger number of pixels. However, an optical system including lenses becomes larger with increasing number of pixels of the image sensing element. Such increase in size of the optical system is to achieve an optical resolution corresponding to the increase in the number of pixels, and even when the size of the image sensing area (image size) of the image sensing element remains the same, an optical system must be designed so as to correspond to such multi-pixels. Especially, in still image sensing, an image sensing element which has a high pixel density approaching a silver halide camera has been put into practical applications, and an image sensing apparatus that can record both still and moving images described in the prior art is beginning to adopt such multi-pixel image sensing element.

However, moving images still use the video format such as NTSC that complies with an existing moving image sensing scheme, and such image need not be recorded at such high resolution that exhibits the resolving power of the multi-pixel image sensing element.

Therefore, upon examining an image sensing apparatus which uses a multi-pixel image sensing element and can record both still and moving images,

such system can improve the resolution of a still image compared to the conventional image sensing apparatuses, but has a bulky optical system, and has a resolution of a moving image as low as the conventional apparatus.

Furthermore, in a so-called zoom lens as an optical system that can vary the focal length, the size of the optical system increases conspicuously, and such tendency is considerable with increasing variable focal length ratio (zoom ratio).

#### SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above situation, and has as its object to provide an image sensing apparatus which assures good balance between the size of an optical system and image quality in correspondence with conditions such as the use purpose of the image sensing apparatus, the required resolution of a sensed image, the size of the image sensing apparatus, and the like, an image sensing method, and a method of designing an optical system used in the image sensing apparatus.

According to the present invention, the foregoing object is attained by providing an image sensing apparatus comprising an image sensing element that converts an optical image of an object passed through an optical transparent member to an image signal, and

an image processing device that performs moving image  
signal processing for processing the image signal  
converted by the image sensing element as a moving  
image signal and still image signal processing for  
5 processing the image signal as a still image signal,  
wherein, when the still image signal processing is to  
be executed, the signal processing device performs  
predetermined control in response to movement of the  
optical transparent member to a predetermined position,  
10 the predetermined control being not performed when the  
moving image signal processing is to be executed.

According to the present invention, the foregoing  
object is also attained by providing an image sensing  
apparatus comprising an image sensing element that  
15 converts an optical image of an object passed through  
an optical transparent member to an image signal, and  
an image processing device that performs first signal  
processing for obtaining an image signal of a first  
resolution from the image signal converted by the image  
20 sensing element and second signal processing for  
obtaining an image signal of a second resolution which  
is higher than the first resolution from the image  
signal, wherein, when the second signal processing is  
to be executed, the signal processing device performs  
25 predetermined control in response to movement of the  
optical transparent member to a predetermined position,

the predetermined control being not performed when the first signal processing is to be executed.

Further, according to the present invention, the foregoing object is also attained by providing an image sensing apparatus comprising an image sensing element that converts an optical image of an object passed through an optical transparent member to an image signal, and an image processing device that performs moving image signal processing for processing the image signal converted by the image sensing element as a moving image signal and still image signal processing for processing the image signal as a still image signal, wherein, when the still image signal processing is to be executed, the signal processing device applies predetermined limitation upon movement of the optical transparent member to a predetermined position, the predetermined limitation being not applied when the moving image signal processing is to be executed.

Further, according to the present invention, the foregoing object is also attained by providing an image sensing apparatus comprising an image sensing element that converts an optical image of an object passed through an optical transparent member to an image signal, and an image processing device that performs first signal processing for obtaining an image signal of a first resolution from the image signal converted



005045960

by the image sensing element and second signal processing for obtaining an image signal of a second resolution which is higher than the first resolution from the image signal, wherein, when the second signal processing is to be executed, the signal processing device applies predetermined limitation upon movement of the optical transparent member to a predetermined position, the predetermined limitation being not applied when the first signal processing is to be executed.

Furthermore, according to the present invention, the foregoing object is also attained by providing an apparatus comprising an image recording device that performs image recording of an optical image of an object passed through an optical transparent member in a first resolution and in a second resolution which is higher than the first resolution, and a control device that performs predetermined control in response to movement of the optical transparent member to a predetermined position when the image recording in the second resolution is to be executed, the predetermined control being not performed when the image recording in the first resolution is to be executed.

Further, according to the present invention, the foregoing object is also attained by providing an apparatus comprising an image recording device that

performs image recording of an optical image of an  
object passed through an optical transparent member in  
a first resolution and in a second resolution which is  
higher than the first resolution, and a control device  
5 for applying predetermined limitation upon movement of  
the optical transparent member to a predetermined  
position when the image recording in the second  
resolution is to be executed, the predetermined  
limitation being not applied when the image recording  
10 in the first resolution is to be executed.

Further, according to the present invention, the  
foregoing object is also attained by providing a  
control method of an image sensing apparatus comprising  
the steps of converting an optical image of an object  
15 passed through an optical transparent member to an  
image signal, and performing moving image signal  
processing for processing the image signal converted by  
the image sensing element as a moving image signal and  
still image signal processing for processing the image  
20 signal as a still image signal, wherein, when the still  
image signal processing is to be executed,  
predetermined control in response to movement of the  
optical transparent member to a predetermined position  
is performed, the predetermined control being not  
25 performed when the moving image signal processing is to  
be executed.

Further, according to the present invention, the foregoing object is also attained by providing a control method of an image sensing apparatus comprising the steps of converting an optical image of an object passed through an optical transparent member to an image signal, and performing first signal processing for obtaining an image signal of a first resolution from the image signal converted by the image sensing element and second signal processing for obtaining an image signal of a second resolution which is higher than the first resolution from the image signal, wherein, when the second signal processing is executed, predetermined control in response to movement of the optical transparent member to a predetermined position is performed, the predetermined control being not performed when the first signal processing is to be executed.

Further, according to the present invention, the foregoing object is also attained by providing a control method of an image sensing apparatus comprising the steps of converting an optical image of an object passed through an optical transparent member to an image signal, and performing moving image signal processing for processing the image signal converted by the image sensing element as a moving image signal and still image signal processing for processing the image

signal as a still image signal, wherein, when the still  
image signal processing is to be executed,  
predetermined limitation upon movement of the optical  
transparent member to a predetermined position is  
5 applied, the predetermined limitation being not applied  
when the moving image signal processing is to be  
executed.

Further, according to the present invention, the  
foregoing object is also attained by providing a  
10 control method of an image sensing apparatus comprising  
the steps of converting an optical image of an object  
passed through an optical transparent member to an  
image signal, and performing first signal processing  
for obtaining an image signal of a first resolution  
15 from the image signal converted by the image sensing  
element and second signal processing for obtaining an  
image signal of a second resolution which is higher  
than the first resolution from the image signal,  
wherein, when the second signal processing is to be  
20 executed, predetermined limitation upon movement of the  
optical transparent member to a predetermined position  
is applied, the predetermined limitation being not  
applied when the first signal processing is to be  
executed.

25 Further, according to the present invention, the  
foregoing object is also attained by providing a

control method of an image recording apparatus  
comprising the steps of performing image recording of  
an optical image of an object passed through an optical  
transparent member in a first resolution and in a  
5 second resolution which is higher than the first  
resolution, and performing predetermined control in  
response to movement of the optical transparent member  
to a predetermined position when the image recording in  
the second resolution is to be executed, the  
10 predetermined control being not performed in the image  
recording when the first resolution is to be executed.

Further, according to the present invention, the  
foregoing object is also attained by providing a  
control method of an image recording apparatus  
15 comprising the steps of performing image recording of  
an optical image of an object passed through an optical  
transparent member in a first resolution and in a  
second resolution which is higher than the first  
resolution, and applying predetermined limitation upon  
20 movement of the optical transparent member to a  
predetermined position when the image recording in the  
second resolution is to be executed, the predetermined  
limitation being not applied in the image recording  
when the first resolution is to be executed.

25 Further, according to the present invention, the  
foregoing object is also attained by providing a method

of designing an optical system, which is attached to an image recording apparatus capable of recording a moving image and a still image of an optical image of an object passed through an optical transparent member, wherein optical property of the optical system is designed allowable for recording the moving image whereas not allowable for recording the still image upon movement of the optical transparent member to a predetermined position.

Further, according to the present invention, the foregoing object is also attained by providing a method of designing an optical system, which is attached to an image recording apparatus capable of performing image recording of an optical image of an object passed through an optical transparent member in a first resolution and in a second resolution which is higher than the first resolution, wherein optical property of the optical system is designed allowable for performing the image recording in the first resolution and not allowable for performing the image recording in the second resolution upon movement of the optical transparent member to a predetermined position.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate

the same or similar parts throughout the figures thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5           The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

10           Fig. 1 is a block diagram showing an arrangement of an image sensing apparatus according to a first embodiment of the present invention;

            Fig. 2 is a graph showing the relationship between the focal length and effective image circle  
15   diameter;

            Fig. 3 is a view showing the relationship between the effective image circle and image sensing area;

            Fig. 4 is a flow chart showing a still image sensing process in the first embodiment;

20           Fig. 5 is a block diagram showing the arrangement of an image sensing apparatus according to a second embodiment of the present invention;

            Fig. 6 is a graph showing the relationship between the focal length and effective image circle  
25   diameter;

Fig. 7 is a view showing the relationship between the effective image circle and image sensing area;

Fig. 8 is a flow chart showing a still image sensing process in the second embodiment;

5        Fig. 9 is a block diagram showing an arrangement of an image sensing apparatus according to a third embodiment of the present invention;

Fig. 10 is a flow chart showing a still image sensing process in the third embodiment;

10       Fig. 11 is a block diagram showing an arrangement of an image sensing apparatus according to a fourth embodiment of the present invention;

Fig. 12 is a graph showing the relationship between the focal length and resolving power;

15       Fig. 13 is a flow chart showing a still image sensing process in the fourth embodiment;

Fig. 14 is a block diagram showing an arrangement of an image sensing apparatus according to a fifth embodiment of the present invention;

20       Fig. 15 is a graph showing the relationship between the focal length and contrast;

Fig. 16 is a flow chart showing a still image sensing process in the fifth embodiment;

25       Fig. 17 is a block diagram showing an arrangement of an image sensing apparatus according to a sixth embodiment of the present invention; and



Fig. 18 is a flow chart showing a still image sensing process in the sixth embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 Preferred embodiments of the present invention will be described in detail in accordance with the accompanying drawings.

##### [First Embodiment]

Fig. 1 is a block diagram showing an arrangement  
10 of an image sensing apparatus of the first embodiment. In the first embodiment, an image sensing apparatus which integrates a video camera, tape recorder, and memory, and records moving and still images on two different recording media (e.g., a moving image on a  
15 tape, and a still image on memory) will be exemplified.

Referring to Fig. 1, reference numeral 301 denotes a lens; 302, a stop; and 304, an image sensing element comprising a photoelectric conversion element such as a CCD. Light that has been transmitted through  
20 the lens 301 passes through the stop 302, and forms an object image on the image sensing surface of the image sensing element 304. The image sensing element 304 generates an electrical signal with a charge amount corresponding to the intensity of light formed on the  
25 image sensing surface.

Reference numeral 303 denotes a zoom lens, the focal length of which is variable. The focal length of the zoom lens 303 can vary as the position of the zoom lens 303 moves freely in correspondence with the user's  
5 setup. Reference numeral 310 denotes a zoom encoder for detecting the position of the zoom lens 303. Based on the detected position of the zoom lens 303, the focal length can be electrically detected.

Reference numeral 305 denotes a moving image  
10 signal processing circuit. Reference numeral 306 denotes a moving image recording unit which comprises a VTR or the like and records a moving image on a medium such as a magnetic tape. Reference numeral 309 denotes a sample & hold circuit for selectively holding and  
15 continuously reading out some of continuous sensed image signals obtained by the image sensing element 304. Especially, when a multi-pixel CCD is used, the sample & hold circuit 309 selects only electrical signals  
20 of the CCD) corresponding to the information volume required in, e.g., NTSC from those obtained by the image sensing element 304. The moving image signal processing circuit 305 converts the signals selected by the sample & hold circuit 309 into continuous moving  
25 images like signals complying with, e.g., NTSC, and

records the converted signals in the moving image recording unit 306.

Reference numeral 307 denotes a still image signal processing circuit which comprises a compressed  
5 signal processing circuit or the like that adopts an image data format such as JPEG. Reference numeral 308 denotes a still image recording unit such as memory. An electrical signal obtained by the image sensing element 304 is passed to the still image recording unit  
10 308 that records a still image on a medium such as memory via the still image signal processing circuit 307. Furthermore, reference numeral 311 denotes a still image recording control circuit for controlling still image recording. Details of the circuit 311 will  
15 be described later.

Note that a timing signal generator (not shown) generates and supplies a reference timing signal to the image sensing element 304, moving image signal processing circuit 305, moving image recording unit 306,  
20 still image signal processing circuit 307, and still image recording unit 308 to synchronously operate them.

Since the apparatus has two recording units, i.e., the moving image recording unit 306 and still image recording unit 308, these units can start and end  
25 recording of still and moving images at arbitrary timings.

0054094500  
In general, the effective image range of an optical system including a zoom lens becomes narrower with increasing focal length of the zoom lens, or becomes broader with decreasing focal length. In the first embodiment of the present invention, in an optical system including the lens 301, stop 302, zoom lens 303, and the like, the effective image ranges at all focal lengths do not always cover the entire image sensing area of the image sensing element 304, but the optical system is designed so that effective image ranges obtained at focal lengths larger than a given focal length cover the entire image sensing area of the image sensing element 304.

Fig. 2 shows an example of characteristics of a change in effective image range (effective image circle diameter) with respect to the focal length of the zoom lens 303. In Fig. 2, the ordinate plots the effective image circle diameter [mm], and the abscissa plots the focal length [mm] that the zoom lens 303 can be set. Furthermore, reference numeral 701 in Fig. 2 denotes a line indicating the diameter of a circle required to cover all the effective pixels (to be referred to as a "full effective image sensing area" hereinafter) of the image sensing element 304. Also, reference numeral 702 denotes a characteristic curve that indicates a change in effective image circle diameter with respect to the

00540" 4559560

focal length. As indicated by the characteristic curve 702, as the focal length changes from the wide-angle side (W) (i.e., the focal length is short) toward the telephoto side (T) (i.e., the focal length is long),  
5 the effective image circle diameter increases, and when the focal length has exceeded a given focal length  $f_a$ , the effective image circle covers the full effective image sensing area of the image sensing element 304.

Fig. 3 explains the state shown in Fig. 2 on the  
10 image sensing surface. Referring to Fig. 3, reference numeral 801 denotes the full effective image sensing area of the image sensing element 304, i.e., the full area that can photoelectrically convert the object image. Reference numeral 803 denotes the size of the  
15 effective image circle that converts the full effective image sensing area of the image sensing element 304. The focal length at that time corresponds to the point  $f_a$  in Fig. 2.

When the focal length changes from  $f_a$  to the  
20 wide-angle side, the effective image circle becomes smaller, as described in Fig. 2, and the effective image circle at the wide-angle side has a size 804. The object image that can be sensed in such case is narrowed down to an area 802. Conversely, when the  
25 focal length changes from  $f_a$  to the telephoto side, the size of the effective image circle exceeds that of the

effective image circle 803, and the same operation as in the conventional apparatus can be done.

Note that the relationship between the size of the effective image circle and the focal length is  
5 contradictory to the size of the lens optical system in optical design, and the following choices may be made. That is, in order to attain a size reduction of the lens optical system, the point indicated by the focal length  $f_a$  is set at the telephoto side, or in order to  
10 make the effective image circle effective over a broad focal length range, the point indicated by the focal length  $f_a$  is set at the wide-angle side causing an increase in size of the lens optical system.

Referring back to Fig. 1, the still image  
15 recording control circuit 311 will be explained below. The circuit 311 checks based on the focal length information obtained by the zoom encoder 310 if the effective image circle diameter at the current focal length set by the user can cover the full effective  
20 image sensing area of the image sensing element 304. If the effective image circle can cover the full effective image sensing area, the circuit 311 permits still image sensing; otherwise, it inhibits image sensing. In other words, when the focal length is on  
25 the telephoto side of the point  $f_a$  on the graph shown in Fig. 2, it is determined that the effective image

circle covers the full effective image sensing area;  
when the focal length is on the wide-angle side of the  
point fa, it is determined that the effective image  
circle does not cover the full effective image sensing  
5 area.

The operation of the still image recording  
control circuit 311 will be explained below with  
reference to the flow chart shown in Fig. 4. This flow  
chart is executed at, e.g., every read reference timing  
10 of the image sensing element 304 (step S10). In step  
S11, the zoom encoder 310 reads the current position  
information of the zoom lens 303 and obtains the focal  
length.

It is checked in step S12 if the current focal  
15 length is equal to or larger than the focal length fa,  
i.e., if the effective image circle covers the full  
effective image sensing area of the image sensing  
element 304. If YES in step S12, the flow advances to  
step S13 to permit still image recording. On the other  
20 hand, if NO in step S12, the flow advances to step S14  
to inhibit still image recording, and the flow advances  
to step S17 to end this flow.

If still image recording is permitted in step S13,  
it is checked in step S15 if the user has pressed a  
25 still image recording trigger button (not shown). If  
YES in step S15, the flow advances to step S16 to

capture an image by storing the current image in the still image recording unit 308. On the other hand, if NO in step S15, the flow jumps to step S17 to end this flow.

5           Note that "still image recording is permitted" in step S13, and "still image recording is inhibited" in step S14, but other operations involved in these operations need not be made. However, when power to the still image recording unit 308 is supplied or  
10 stopped in correspondence with permission or inhibition of still image recording, electric power can be efficiently used.

Still image sensing has been explained. In moving image sensing, some of signals obtained from the  
15 image sensing element 304 are continuously recorded. As described above, since the number of pixels required for moving image display that complies with the existing scheme such as NTSC or the like is smaller than that required for a still image, the sample & hold  
20 circuit 309 temporarily selects and holds only image signals obtained from predetermined pixels of an arbitrary central area of the full effective image sensing area of the image sensing element 304, and the held signals are continuously read out and recorded.

25           For example, when the moving image sensing area is set to be equal to or smaller than the effective



image range at the wide-angle side (area 804 in Fig. 3), since the moving image sensing area can fall within the effective image range irrespective of the focal length, image sensing can be normally done. Conversely, when

5 the optical system is designed so that the moving image sensing area (area 802 in Fig. 3) inscribes the effective image range (area 804 in Fig. 3) at the wide-angle side, the size of the lens optical system can be minimized.

10 [Second Embodiment]

In the first embodiment, still image sensing is permitted or inhibited in accordance with the relationship between the focal length and effective image circle. Alternatively, the second embodiment is

15 characterized in that the image range in the still image sensing mode is changed in accordance with the relationship between the focal length and effective image circle.

Fig. 5 is a block diagram showing an arrangement

20 of an image sensing apparatus of the second embodiment. In the following description, the same reference numerals denote building components that have already been explained in Fig. 1, and a detailed description thereof will be omitted. The still image recording

25 control circuit 311 checks based on the focal length information obtained by the zoom encoder 310 if the

effective image circle diameter at the current focal length set by the user covers the full effective image sensing area of the image sensing element 304, in the same manner as that described in the first embodiment.

- 5 In the second embodiment, when the effective image circle diameter does not cover the full effective image sensing area, an image range that is to undergo a still image signal process is selected via an extraction position control circuit 313 in place of inhibiting
- 10 still image sensing, and only a specific image range is extracted as a still image and undergoes a signal process.

This operation will be described in more detail below using Fig. 6. The graph shown in Fig. 6 shows

15 the relationship between the focal length and effective image circle diameter as in Fig. 2 described in the first embodiment. In this embodiment, a state wherein the focal length is on the wide-angle side of  $f_a$ , and the effective circle diameter is smaller than that of a

20 circle which covers the full effective image sensing area of the image sensing element 304, i.e., the diameter assumes a value smaller than the value of a line 701 must be noted. In the first embodiment, still image sensing in this state is inhibited. In such

25 state, although image data of the full effective image sensing area cannot be obtained, only an image that can

be sensed within the effective image circle with a diameter indicated by a line 703 in Fig. 6 can be captured as a still image.

More specifically, when the focal length becomes smaller than  $f_a$ , the image sensing area 802 that inscribes the effective image circle on the wide-angle side shown in Fig. 3 is set as a still image sensing area, and that area is extracted. When only this range undergoes a still image signal process, a still image can be sensed although the image area to be sensed becomes small.

As indicated by the line 703 in Fig. 6, the still image extraction area may be gradually narrowed down, as indicated by a line 704 in accordance with the focal length in place of being fixed when the focal length is smaller than  $f_a$ . Further, when the effective image circle diameter becomes smaller than that of the circle circumscribing the full effective image sensing area (i.e., when the focal length is smaller than  $f_a$ ), the aspect ratio of the area where data is read out from the image sensing element 304 as a still image need not always be that of the image sensing element 304. For example, the area to be read out from the image sensing element may have a square shape as indicated by an area 805 in Fig. 7 or even circular shape.

005760" 8-4-69 0930

The operations of the still image recording control circuit 311 and extraction position control circuit 313 will be explained below with reference to the flow chart shown in Fig. 8. This flow chart is  
5 executed at, e.g., every read reference timing of the image sensing element 304 (step S20). In step S21, the zoom encoder 310 reads the current position information of the zoom lens 303 and obtains the focal length.

It is checked in step S22 if the current focal  
10 length is equal to or larger than the focal length  $f_a$ , i.e., if the effective image circle covers the full effective image sensing area of the image sensing element 304. If YES in step S22, the flow advances to step S23 to set a still image recording standby state  
15 using all pixels. On the other hand, if NO in step S22, the flow advances to step S24 to select pixels corresponding to the current focal length, thus setting a still image recording standby state.

It is checked in step S25 if the user has pressed  
20 a still image recording trigger button (not shown). If YES in step S25, the flow advances to step S26 to capture an image by storing the current image in the still image recording unit 308. On the other hand, if NO in step S25, the flow jumps to step S27 to end this  
25 flow.

005760 "C4E3960

As an operation for "selecting pixels  
corresponding to the focal length" in step S24, a  
method of setting a look-up table that outputs the  
position of a pixel used in image sensing as vertical  
5 and horizontal coordinate positions using the focal  
length as an argument, a method of selecting an area  
based on a computation result from the central  
coordinate position of the image sensing element using  
a pre-set approximate expression that uses the focal  
10 length as a variable, or the like may be used. However,  
the present invention is not limited to these specific  
methods, and any methods may be used as long as an  
arbitrary area within the effective image circle can be  
selected.

15 The extraction position control circuit 313  
informs the still image signal processing circuit 307  
of the image sensing area to be used in the still image  
signal process as the shape, size, distance from the  
center, and the like (, pre-stored as data,) of a  
20 figure to be extracted and reads out pixel signals of  
only that area, thus obtaining a still image which does  
not contain any area outside the effective image circle.  
[Third Embodiment]

In the first and second embodiments, still image  
25 sensing is inhibited or a pixel signal read area of the  
still image signal is changed under the condition in

which the effective image circle diameter cannot cover the full effective image sensing area of the image sensing element 304. Alternatively, the third embodiment does not limit the read operation itself of an image signal, but informs the user that an image sensing area suffers an optical shadow in the still image sensing mode by producing an alert.

Fig. 9 is a block diagram showing the arrangement of an image sensing apparatus of the third embodiment. In the following description, the same reference numerals denote building components that have already been explained in Fig. 1, and a detailed description thereof will be omitted. Reference numeral 312 denotes an alert device which executes a discrimination process in accordance with the focal length detected by the zoom encoder 310, and produces an alert to the user when an optical shadow is formed in the still image sensing mode. This alert device 312 includes a buzzer that produces alert sound, a lamp that makes alert indication, and means for making given display on an electronic viewfinder which is used to confirm a sensed image.

The operation of the alert device 312 will be explained below with reference to the flow chart shown in Fig. 10. This flow chart is executed at, e.g., every read reference timing of the image sensing

element 304 (step S30). In step S31, the zoom encoder 310 reads the current position information of the zoom lens 303 and obtains the focal length.

It is checked in step S32 if the current focal length is equal to or larger than the focal length  $f_a$ , i.e., if the effective image circle covers the full effective image sensing area of the image sensing element 304. If YES in step S32, the flow directly advances to step S35. On the other hand, if NO in step S32, the flow advances to step S34 to produce an alert indicating that the image sensing circle does not cover the full effective image sensing area of the image sensing element 304 in the still image sensing mode, and the flow then advances to step S35.

It is checked in step S35 if the user has pressed a still image recording trigger button (not shown). If YES in step S35, the flow advances to step S36 to capture an image by storing the current image in the still image recording unit 308. On the other hand, if NO in step S35, the flow jumps to step S37 to end this flow.

[Fourth Embodiment]

The first to third embodiments have exemplified the apparatus which selects only a local area of the image sensing element 304 by the sample & hold circuit 309 upon moving image recording. Alternatively, the

fourth to sixth embodiments to be described later are premised on an apparatus that uses the entire area of the image sensing element 304 upon moving image recording.

5           Fig. 11 is a block diagram showing the arrangement of an image sensing apparatus of the fourth embodiment. The still image recording control circuit 311 checks based on the focal length information  
10           obtained by the zoom encoder 310 if the resolving power corresponding to the current focal length satisfies the required resolving power upon sensing a still image, and inhibits still image recording if it does not satisfy.

          In the fourth embodiment, in the optical system  
15           including the lens 301, stop 302, and zoom lens 303, the resolutions in the entire focal point do not always assume values that can satisfy the resolution of the image sensing element 304, but the optical system is designed so that only a range obtained at focal lengths  
20           shorter than a given focal length can satisfy the resolution of the image sensing element 304, so as to avoid an increase in size of the lens optical system.

          The resolving power of the zoom lens 303 corresponding to the multi-pixel image sensing element  
25           will be explained below using Fig. 12. Fig. 12 shows a change in resolving power [lines/mm] plotted along the



ordinate with respect to the focal length [mm] plotted along the abscissa.

In Fig. 12, reference numeral 501 denotes a characteristic curve that indicates the resolving power of the zoom lens 303 with respect to the focal length. As can be seen from this curve, the resolving power lowers with increasing the focal length. Such resolving power characteristics are determined by balance between the size of the optical system and the resolving power to be obtained at each focal length in optical system design. Designing an optical system with the characteristics shown in the graph in Fig. 12 attaches importance on the resolving power on the wide-angle side (W) at which the focal length is short, and slightly sacrifices that on the telephoto side (T) at which the focal length is large, thus attaining a size reduction of the image sensing optical system.

Reference numeral 502 denotes a line indicating the resolving power required in the still image sensing mode. Upon sensing a still image, a resolving power equal to or higher than a threshold value indicated by the line 502 is required. The resolving power 502 required in the still image sensing mode can be uniquely calculated from the resolution (pixel pitch) of the image sensing element 304.

Reference numeral 503 denotes a line indicating the resolving power required in the moving image sensing mode. Upon sensing a moving image, a resolving power equal to or higher than a threshold value indicated by the line 503 is required. The resolving power 503 required in the moving image sensing mode can be obtained based on the recording resolution of the moving image recording unit 306 or that of the moving image signal processing circuit 305, and a smaller one of these values is used as the required resolving power 503.

The reason why the required resolving power 502 in the still image sensing mode and the required resolving power 503 in the moving image sensing mode are independently set is that a still image requires a higher resolution of the image sensing element to meet high-image quality needs, but a moving image can only have a resolution as low as that of the conventional apparatus since a display device that can reproduce only a resolution as low as that of the conventional apparatus such as a prevalent monitor that complies with NTSC is used, as described earlier.

As can be seen from the graph shown in Fig. 12, optical characteristics are locally sacrificed by a size reduction of the optical system in optical system design. In a range (still image sensing unsuitable

range) 504 where the optical characteristics are sacrificed and which is not suitable for sensing a still image on the telephoto side of a focal length  $f_s$ , a resolution required in the still image sensing cannot  
5 be obtained, but there is no problem to perform moving image sensing that requires only a low resolution.

The still image recording control circuit 311 will be described below. The circuit 311 checks based on the focal length information obtained by the zoom  
10 encoder 310 if the resolving power of the zoom lens 303 at the current focal length set by the user has a satisfactory value in still image sensing. If the resolving power has a satisfactory value, the circuit 311 permits still image sensing; otherwise, it inhibits  
15 still image sensing. More specifically, when the focal length obtained by the zoom encoder 310 falls within the still image sensing unsuitable range 504, since moving image sensing is possible but a resolution required for still image sensing cannot be obtained,  
20 still image sensing is inhibited.

The operation of the still image recording control circuit 311 will be described below with reference to the flow chart shown in Fig. 13. This flow chart is executed at, e.g., every read reference  
25 timing of the image sensing element 304 (step S40). In step S41, the zoom encoder 310 reads the current

position information of the zoom lens 303 and obtains the focal length.

It is checked in step S42 if the current focal length is equal to or smaller than the focal length  $f_s$ ,  
5 i.e., if the resolving power corresponding to the current focal length satisfies the required resolving power in the still image sensing mode. If YES in step S42, the flow advances to step S43 to permit still image recording. On the other hand, if NO in step S42,  
10 the flow advances to step S44 to inhibit still image recording, and the flow then advances to step S47 to end this flow.

If still image recording is permitted in step S43, it is checked in step S45 if the user has pressed a  
15 still image recording trigger button (not shown). If YES in step S45, the flow advances to step S46 to capture an image by storing the current image in the still image recording unit 308. On the other hand, if NO in step S45, the flow jumps to step S47 to end this  
20 flow.

As has been explained in the first embodiment, other special operations need not be made in accordance with the operation for "permitting still image recording" in step S43 or the operation for "inhibiting  
25 still image recording" in step S44. However, when power supply to the still image recording unit 308 is

supplied or stopped in correspondence with permission or inhibition of still image recording, for instance, electric power can be efficiently used.

5 The fourth embodiment has exemplified the optical design that sacrifices the resolving power on the telephoto side at which the focal length is large. The resolving power may be sacrificed on the wide-angle side at which the focal length is short or on both the wide-angle and telephoto sides upon designing the optical system, so as to achieve size reduction design of the optical system, and this embodiment is also effective in such case.

[Fifth Embodiment]

15 The fourth embodiment adopts the arrangement that pays attention to the relationship between the focal length and optical resolving power. Alternatively, the fifth embodiment pays attention to the relationship between the focal length and optical contrast. Still image sensing may be inhibited as in the fourth embodiment; however, in the following description, a signal process in the still image sensing mode is changed.

25 Fig. 14 is a block diagram showing an arrangement of an image sensing apparatus of the fifth embodiment. In the fifth embodiment as well, a sample & hold circuit 316 is provided. However, this sample & hold

005460 546050  
circuit 316 thins out photoelectrically converted  
signals obtained from the image sensing element 304 to  
limit signals to those in a predetermined frequency  
range in place of making area selection unlike the  
5 sample & hold circuit 309 described in the first to  
third embodiments. Note that the sampling timing can  
be determined by the frequency of the moving image  
signal processing circuit 305 or moving image recording  
unit 306.

10 The still image recording control circuit 311  
checks based on the focal length information obtained  
by the zoom encoder 310 if the contrast at the current  
focal length set by the user satisfies the resolution  
of the image sensing element in the still image sensing  
15 mode. The circuit 311 controls the compression ratio  
of a compression process in the still image signal  
processing circuit 307 via a compression control  
circuit 315 in accordance with the checking result.

More specifically, if the still image recording  
20 control circuit 311 determines that the contrast at the  
current focal length set by the user does not satisfy  
the resolution of the image sensing element 304 in the  
still image sensing mode, the circuit 311 executes one  
of a control process (1) that sets a high compression  
25 ratio of the still image signal processing circuit 307  
(sets compression ratio A) to decrease the data size at

the cost of reproducibility of an image in the frequency range that cannot be reproduced, and a control process (2) that sets a low compression ratio of the still image signal processing circuit 307 (sets  
5 compression ratio B) to reproduce the frequency range that is hard to reproduce even by increasing the data size.

When a high compression ratio is set as in the control process (1), the frequency range that can be  
10 reproduced is narrowed down, but the data size can be reduced. Hence, if the frequency range that can be reproduced is narrowed due to a decrease in optical contrast, the storage efficiency of the still image recording unit 308 can be effectively used by executing  
15 a signal processing at the high compression ratio.

By contrast, when a low compression ratio is set as in the control process (2), since the frequency range that can be reproduced is broadened, still image recording can be done without deteriorating any more  
20 reproducibility in the frequency range in which the optical contrast has been attenuated.

Regarding the compression ratio of the still image signal processing circuit 307 to be controlled by the compression control circuit 315, a high compression  
25 ratio can be set by; e.g., computing an orthogonal transform represented by a DCT (discrete cosine

transform) or the like, and removing its high-frequency term, and a low compression ratio can be set by keeping the high-frequency term. Note that the present invention is not limited to such specific compression method, and various other known compression methods may be used.

The contrast of the zoom lens 303 corresponding to the multi-pixel image sensing element will be explained below using Fig. 15. Fig. 15 shows a typical change in contrast of the predetermined resolution at, e.g., the lens central position, and a change in contrast [%] is plotted along the ordinate with respect to the focal length [mm] plotted along the abscissa.

In Fig. 15, reference numeral 601 denotes a characteristic curve indicating a change in contrast with respect to the focal length. As can be seen from the curve 601, the contrast becomes lower with increasing focal length. By slightly sacrificing the contrast, a size reduction of the optical system can be achieved. A decrease in sacrificed contrast is conspicuous especially on the telephoto side at which the focal length is large.

Reference numeral 602 denotes a line indicating the first contrast required in the still image sensing mode. Still image sensing requires the contrast equal to or higher than a threshold value indicated by the



line 602. At the contrast equal to or higher than this threshold value, the resolution and element sensitivity of the image sensing element 304 can be satisfactorily reproduced. Reference numeral 603 denotes a line  
5 indicating the second contrast at which the process of the still image signal processing circuit 307 is to be changed in the still image sensing mode, and which is used as a reference upon determining a high or low compression ratio in the signal process to be described  
10 later.

Reference numeral 604 denotes a line indicating the contrast required in the moving image sensing mode. When a moving image is sensed, a contrast equal to or higher than a threshold value indicated by the line 604  
15 is required.

As can be seen from the graph in Fig. 15, when the size of the optical system is reduced in optical system design, the optical characteristics are locally sacrificed. In a still image sensing focal length  
20 range 605 from focal lengths  $f_{c1}$  to  $f_{c2}$ , since a contrast required for still image sensing cannot be obtained, the signal process in the still image signal processing circuit 307 is changed to change the compression ratio. Furthermore, in a still image  
25 sensing focal length range 606 on the telephoto side of  $f_{c2}$ , the compression ratio is further changed.

The operations of the still image recording control circuit 311 and compression control circuit 315 will be described below with reference to the flow chart shown in Fig. 16. This flow chart is executed at, 5 e.g., every read reference timing of the image sensing element 304 (step S50). In step S51, the zoom encoder 310 reads the current position information of the zoom lens 303 and obtains the focal length.

It is checked in step S52 if the current focal 10 length is equal to or smaller than the focal length  $fc1$ , i.e., if the contrast corresponding to the current focal length satisfies the first contrast required in the still image sensing mode. If YES in step S52, the flow advances to step S54 to select a normal 15 compression ratio, thus setting a still image recording standby state. On the other hand, if NO in step S52, the flow advances to step S53.

It is checked in step S53 if the current focal length is equal to or smaller than the focal length  $fc2$ . 20 If YES in step S53 (within the still image sensing focal length range 605 between the focal lengths  $fc1$  and  $fc2$  in Fig. 15), compression ratio A is selected, and the still image recording standby state is set (step S55). That is, as in the control process 25 (1) described above, a high compression ratio of the still image signal processing circuit 307 is set, and

the data size is reduced by sacrificing the reproducibility of the frequency range that cannot be reproduced, thus effectively using the storage of the still image recording unit 308.

5           On the other hand, if NO in step S53 (the still image sensing focal length range 606 on the telephoto side of the focal length  $fc_2$  in Fig. 15), compression ratio B is selected, and the still image recording standby state is set (step S56). That is, as in the  
10   control process (2) described above, a low compression ratio of the still image signal processing circuit 307 is set to reproduce the frequency range that is hard to reproduce even by increasing the data size, thus recording an image without deteriorating any more  
15   reproducibility in the frequency range in which the optical contrast has been attenuated.

          It is checked in step S57 if the user has pressed a still image recording trigger button (not shown). If YES in step S57, the flow advances to step S58 to  
20   capture an image by storing the current image in the still image recording unit 308. On the other hand, if NO in step S57, the flow jumps to step S59 to end this flow.

          In the fifth embodiment, the focal length range  
25   is divided into three ranges, i.e., the still image sensing focal length ranges 605 and 606, and the

remaining focal length range as shown in Fig. 15, and signal processes are done at different compression ratios. Alternatively, the compression ratio may be continuously changed as the focal length changes.

5 [Sixth Embodiment]

In the fourth and fifth embodiments, the relationship between the focal length and optical resolving power and between the focal length and contrast have been explained. As another factor that  
10 influences the characteristics of an optical system, aberration is known. As for aberration, deterioration of its characteristics tends to be emphasized with increasing focal length as in the contrast explained with reference to Fig. 15. Therefore, a reference  
15 focal length  $f_r$  is set for aberration, and discrimination and process are done based on this focal length  $f_r$ . When the focal length  $f_r$  is exceeded, still image recording may be inhibited, as described in the first embodiment, or the still image signal process may  
20 be changed (e.g., the compression ratio may be changed), as described in the fifth embodiment. In the sixth embodiment, an alert is produced.

Fig. 17 is a block diagram showing the arrangement of an image sensing apparatus of the sixth  
25 embodiment. In the following description, the same reference numerals denote building components that have

already been explained in Fig. 1, and a detailed description thereof will be omitted. An alert device 312 executes a discrimination process in accordance with the focal length detected by the zoom encoder 310, and produces an alert to the user when optical deterioration will take place in the still image sensing mode. This alert device 312 includes a buzzer that produces alert sound, a lamp that makes alert indication, and means for making given display on an electronic viewfinder which is used to confirm a sensed image.

The operation of the alert device 312 will be explained below with reference to the flow chart shown in Fig. 18. This flow chart is executed at, e.g., every read reference timing of the image sensing element 304 (step S60). In step S61, the zoom encoder 310 reads the current position information of the zoom lens 303 and obtains the focal length.

It is checked in step S62 if the current focal length is equal to or smaller than the focal length  $f_r$ , i.e., if the aberration corresponding to the focal length satisfies the level required in the still image sensing mode. If YES in step S62, the flow directly advances to step S64. On the other hand, if NO in step S62, the flow advances to step S63 to produce an alert indicating that the aberration does not satisfy an

allowable level in the still image sensing mode, and the flow then advances to step S64.

It is checked in step S64 if the user has pressed a still image recording trigger button (not shown). If  
5 YES in step S64, the flow advances to step S65 to capture an image by storing the current image in the still image recording unit 308. On the other hand, if NO in step S64, the flow jumps to step S65 to end this flow.

10 In the first to sixth embodiments, the still image control circuit 311, extraction position control circuit 313, a discrimination processor of the alert device 312, and compression control circuit 315, may be implemented by, e.g., a microcomputer to execute the  
15 flow charts explained in the respective embodiments.

It should be noted that, in the above embodiments, still image recording is inhibited when the focal length is changed across a predetermined focal length; however, the present invention is not limited to this,  
20 and the still image recording may not be completely inhibited and merely limited by, e.g., releasing the inhibition of still image recording by a release member. Further, instead of inhibiting and limiting the still image recording, the position of a zoom lens may be  
25 inhibited or limited so that the focal length does not

become the predetermined focal length upon still image recording.

Further, the limitation of the still image recording is due to deterioration of resolution  
5 corresponding to the focal length in the above embodiments; however, the present invention is also applicable to cases in which an image is deteriorated due to movement of an optical transparent member which passes an optical image of an object, such as  
10 deterioration of an image due to the focus position and a filter.

Furthermore, both of the moving image and still image are recorded on a recording medium according to the above embodiments, however, one or both of these  
15 images may be only displayed or outputted to another apparatus and not recorded on a recording medium.

Further, control processes are changed between a moving image and a still image; however, the present invention is not limited to the moving image and still  
20 image, and is applicable to a case of obtaining an image having a first resolution and an image having a second resolution which is higher than the first resolution using, e.g., a multi-pixel image sensing element. In this case, the image of the first  
25 resolution corresponds to the moving image of the above

embodiments, and the image of the second resolution corresponds to a still image of the above embodiments.

<Other Embodiment>

The present invention can be applied to a system  
5 constituted by a plurality of devices (e.g., host computer, interface, camera head) or to an apparatus comprising a single device (e.g., digital movie camera).

Further, the object of the present invention can also be achieved by providing a storage medium storing  
10 program codes for performing the aforesaid processes to a computer system or apparatus (e.g., a personal computer), reading the program codes, by a CPU or MPU of the computer system or apparatus, from the storage medium, then executing the program.

15 In this case, the program codes read from the storage medium realize the functions according to the embodiments, and the storage medium storing the program codes constitutes the invention.

Further, the storage medium, such as a floppy  
20 disk, a hard disk, an optical disk, a magneto-optical disk, CD-ROM, CD-R, a magnetic tape, a non-volatile type memory card, and ROM can be used for providing the program codes.

Furthermore, besides aforesaid functions  
25 according to the above embodiments are realized by executing the program codes which are read by a



computer, the present invention includes a case where  
an OS (operating system) or the like working on the  
computer performs a part or entire processes in  
accordance with designations of the program codes and  
5 realizes functions according to the above embodiments.

Furthermore, the present invention also includes  
a case where, after the program codes read from the  
storage medium are written in a function expansion card  
which is inserted into the computer or in a memory  
10 provided in a function expansion unit which is  
connected to the computer, CPU or the like contained in  
the function expansion card or unit performs a part or  
entire process in accordance with designations of the  
program codes and realizes functions of the above  
15 embodiments.

Further, software configuration and hardware  
configuration disclosed in the above embodiments may be  
exchanged.

It should be noted that the present invention  
20 includes combinations of the aforesaid embodiments or  
technical elements disclosed therein.

Further, the present invention is applicable to:  
various types of cameras, such as a camera using a  
silver-halide film, a lens-exchangeable camera, a  
25 single-lens reflex camera, a leaf shutter camera, and a  
monitor camera; an image sensing apparatus other than

cameras; an image reading apparatus; an optical  
apparatus; and the like; an apparatus applied to  
cameras, an image sensing apparatus, an image reading  
apparatus, an optical apparatus, and the like; elements  
5 forming the foregoing apparatuses; control method of  
the foregoing apparatuses; and a computer program  
product for providing the control method.

The present invention is not limited to the above  
embodiments and various changes and modifications can  
10 be made within the spirit and scope of the present  
invention. Therefore to apprise the public of the  
scope of the present invention, the following claims  
are made.

WHAT IS CLAIMED IS:

1. An image sensing apparatus comprising:

(A) an image sensing element that converts an optical image of an object passed through an optical transparent member to an image signal; and

(B) an image processing device that performs moving image signal processing for processing the image signal converted by said image sensing element as a moving image signal and still image signal processing for processing the image signal as a still image signal,

wherein, when said still image signal processing is to be executed, said signal processing device performs predetermined control in response to movement of said optical transparent member to a predetermined position, said predetermined control being not performed when said moving image signal processing is to be executed.

2. The image sensing apparatus according to claim 1, wherein said signal processing device does not perform said predetermined control when the optical transparent member does not move to the predetermined position.

3. The image sensing apparatus according to claim 1,  
wherein said signal processing device limits said still  
image signal processing as said predetermined control.
4. The image sensing apparatus according to claim 1,  
5 wherein said signal processing device inhibits said  
still image signal processing as said predetermined  
control.
5. The image sensing apparatus according to claim 1,  
wherein said still image signal processing includes a  
10 recording process of a still image signal on an image  
recording medium.
6. The image sensing apparatus according to claim 5,  
wherein said signal processing device limits said  
recording process of the still image signal as said  
15 predetermined control.
7. The image sensing apparatus according to claim 5,  
wherein said signal processing device inhibits said  
recording process of the still image signal as said  
predetermined control.
- 20 8. The image sensing apparatus according to claim 5,  
wherein said signal processing device changes a  
compression ratio of the still image signal to be  
recorded on the image recording medium as said  
predetermined control.
- 25 9. The image sensing apparatus according to claim 5,  
wherein said signal processing device increases a

compression ratio of the still image signal to be recorded on the image recording medium as said predetermined control.

10. The image sensing apparatus according to claim 1,  
5 wherein said signal processing device changes a utilization area of the image signal with respect to an image sensing area of said image sensing element as said predetermined control.

11. The image sensing apparatus according to claim 1,  
10 wherein said signal processing device turns off the image sensing apparatus as said predetermined control.

12. The image sensing apparatus according to claim 1, wherein said signal processing device produces an alert as said predetermined control.

13. The image sensing apparatus according to claim 1  
15 further comprising a notification device which notifies a state of said signal processing device upon performing said predetermined control.

14. The image sensing apparatus according to claim 1,  
20 wherein a detector that detects a moving position of said optical transparent member.

15. The image sensing apparatus according to claim 1,  
wherein said image sensing device includes said optical  
25 transparent member.

16. The image sensing apparatus according to claim 1,  
wherein said optical transparent member comprises a  
lens.

17. The image sensing apparatus according to claim 1,  
5 wherein said optical transparent member comprises an  
optical filter.

18. The image sensing apparatus according to claim 1,  
wherein a predetermined focal length state can be  
determined based on the movement of said optical  
10 transparent member to said predetermined position.

19. The image sensing apparatus according to claim 1,  
wherein a predetermined focus position state can be  
15 determined based on the movement of said optical  
transparent member to said predetermined position.

20. An image sensing apparatus comprising:

20 (A) an image sensing element that converts an  
optical image of an object passed through an optical  
transparent member to an image signal; and

(B) an image processing device that performs  
25 first signal processing for obtaining an image signal  
of a first resolution from the image signal converted

by said image sensing element and second signal processing for obtaining an image signal of a second resolution which is higher than the first resolution from the image signal,

5            wherein, when said second signal processing is to be executed, said signal processing device performs predetermined control in response to movement of said optical transparent member to a predetermined position, said predetermined control being not performed when  
10        said first signal processing is to be executed.

21.    An image sensing apparatus comprising:

          (A) an image sensing element that converts an optical image of an object passed through an optical  
15        transparent member to an image signal; and

          (B) an image processing device that performs moving image signal processing for processing the image signal converted by said image sensing element as a  
20        moving image signal and still image signal processing for processing the image signal as a still image signal,

          wherein, when said still image signal processing is to be executed, said signal processing device  
25        applies predetermined limitation upon movement of said optical transparent member to a predetermined position,

said predetermined limitation being not applied when  
said moving image signal processing is to be executed.

22. The image sensing apparatus according to claim 21,  
wherein said signal processing device does not apply  
5 said predetermined limitation when the optical  
transparent member does not move to the predetermined  
position.

23. The image sensing apparatus according to claim 21,  
10 wherein said signal processing device inhibits said  
optical transparent member to move to said  
predetermined position as said predetermined limitation.

24. The image sensing apparatus according to claim 21,  
15 wherein said image sensing device includes said optical  
transparent member.

25. The image sensing apparatus according to claim 21,  
wherein said optical transparent member comprises a  
lens.

20 26. The image sensing apparatus according to claim 21,  
wherein said optical transparent member comprises an  
optical filter.

27. The image sensing apparatus according to claim 21,  
wherein a predetermined focal length state is set due  
25 to the movement of said optical transparent member to  
said predetermined position.



28. The image sensing apparatus according to claim 21, wherein a predetermined focus position state is set due to the movement of said optical transparent member to said predetermined position.

5 29. An image sensing apparatus comprising:

(A) an image sensing element that converts an optical image of an object passed through an optical transparent member to an image signal; and

10 (B) an image processing device that performs first signal processing for obtaining an image signal of a first resolution from the image signal converted by said image sensing element and second signal processing for obtaining an image signal of a second  
15 resolution which is higher than the first resolution from the image signal,

wherein, when said second signal processing is to be executed, said signal processing device applies predetermined limitation upon movement of said optical  
20 transparent member to a predetermined position, said predetermined limitation being not applied when said first signal processing is to be executed.

30. An apparatus comprising:

25 (A) an image recording device that performs image recording of an optical image of an object passed

through an optical transparent member in a first resolution and in a second resolution which is higher than the first resolution; and

(B) a control device that performs predetermined control in response to movement of said optical transparent member to a predetermined position when said image recording in said second resolution is to be executed, said predetermined control being not performed when said image recording in said first resolution is to be executed.

31. An apparatus comprising:

(A) an image recording device that performs image recording of an optical image of an object passed through an optical transparent member in a first resolution and in a second resolution which is higher than the first resolution; and

(B) a control device for applying predetermined limitation upon movement of said optical transparent member to a predetermined position when said image recording in said second resolution is to be executed, said predetermined limitation being not applied when said image recording in said first resolution is to be executed.

32. A control method of an image sensing apparatus comprising the steps of:

converting an optical image of an object passed through an optical transparent member to an image  
5 signal; and

performing moving image signal processing for processing the image signal converted by said image sensing element as a moving image signal and still image signal processing for processing the image signal  
10 as a still image signal,

wherein, when said still image signal processing is to be executed, predetermined control in response to movement of said optical transparent member to a predetermined position is performed, said predetermined  
15 control being not performed when said moving image signal processing is to be executed.

33. A control method of an image sensing apparatus comprising the steps of:

20 converting an optical image of an object passed through an optical transparent member to an image signal; and

performing first signal processing for obtaining an image signal of a first resolution from the image  
25 signal converted by said image sensing element and second signal processing for obtaining an image signal

of a second resolution which is higher than the first resolution from the image signal,

wherein, when said second signal processing is executed, predetermined control in response to movement of said optical transparent member to a predetermined position is performed, said predetermined control being not performed when said first signal processing is to be executed.

34. A control method of an image sensing apparatus comprising the steps of:

converting an optical image of an object passed through an optical transparent member to an image signal; and

performing moving image signal processing for processing the image signal converted by said image sensing element as a moving image signal and still image signal processing for processing the image signal as a still image signal,

wherein, when said still image signal processing is to be executed, predetermined limitation upon movement of said optical transparent member to a predetermined position is applied, said predetermined limitation being not applied when said moving image signal processing is to be executed.

35. A control method of an image sensing apparatus comprising the steps of:

converting an optical image of an object passed through an optical transparent member to an image

5 signal; and

performing first signal processing for obtaining an image signal of a first resolution from the image signal converted by said image sensing element and second signal processing for obtaining an image signal  
10 of a second resolution which is higher than the first resolution from the image signal,

wherein, when said second signal processing is to be executed, predetermined limitation upon movement of said optical transparent member to a predetermined  
15 position is applied, said predetermined limitation being not applied when said first signal processing is to be executed.

36. A control method of an image recording apparatus comprising the steps of:

20 performing image recording of an optical image of an object passed through an optical transparent member in a first resolution and in a second resolution which is higher than the first resolution; and

25 performing predetermined control in response to movement of said optical transparent member to a

predetermined position when said image recording in  
said second resolution is to be executed, said  
predetermined control being not performed in said image  
recording when said first resolution is to be executed.

5 37. A control method of an image recording apparatus  
comprising the steps of:

performing image recording of an optical image of  
an object passed through an optical transparent member  
in a first resolution and in a second resolution which  
10 is higher than the first resolution; and

applying predetermined limitation upon movement  
of said optical transparent member to a predetermined  
position when said image recording in said second  
15 resolution is to be executed, said predetermined  
limitation being not applied in said image recording  
when said first resolution is to be executed.

38. A method of designing an optical system, which is  
20 attached to an image recording apparatus capable of  
recording a moving image and a still image of an  
optical image of an object passed through an optical  
transparent member, wherein optical property of the  
optical system is designed allowable for recording the  
25 moving image whereas not allowable for recording the

still image upon movement of said optical transparent member to a predetermined position.

39. A method of designing an optical system, which is attached to an image recording apparatus capable of performing image recording of an optical image of an object passed through an optical transparent member in a first resolution and in a second resolution which is higher than the first resolution, wherein optical property of the optical system is designed allowable for performing the image recording in said first resolution and not allowable for performing the image recording in said second resolution upon movement of said optical transparent member to a predetermined position.

40. A computer program applied for image sensing apparatus including program codes of:

converting an optical image of an object passed through an optical transparent member to an image signal; and

performing moving image signal processing for processing the image signal converted by said image sensing element as a moving image signal and still image signal processing for processing the image signal as a still image signal,

wherein, when said still image signal processing is to be executed, predetermined control in response to

movement of said optical transparent member to a predetermined position is performed, said predetermined control being not performed when said moving image signal processing is to be executed.

- 5 41. A computer program applied for image sensing apparatus including program codes of:

converting an optical image of an object passed through an optical transparent member to an image signal; and

- 10 performing first signal processing for obtaining an image signal of a first resolution from the image signal converted by said image sensing element and second signal processing for obtaining an image signal of a second resolution which is higher than the first resolution from the image signal,
- 15

- wherein, when said second signal processing is executed, predetermined control in response to movement of said optical transparent member to a predetermined position is performed, said predetermined control being not performed when said first signal processing is to be executed.
- 20

42. A computer program applied for image sensing apparatus including program codes of:

- converting an optical image of an object passed through an optical transparent member to an image signal; and
- 25



performing moving image signal processing for  
processing the image signal converted by said image  
sensing element as a moving image signal and still  
image signal processing for processing the image signal  
5 as a still image signal,

wherein, when said still image signal processing  
is to be executed, predetermined limitation upon  
movement of said optical transparent member to a  
predetermined position is applied, said predetermined  
10 limitation being not applied when said moving image  
signal processing is to be executed.

43. A computer program applied for image sensing  
apparatus including program codes of:

converting an optical image of an object passed  
15 through an optical transparent member to an image  
signal; and

performing first signal processing for obtaining  
an image signal of a first resolution from the image  
signal converted by said image sensing element and  
20 second signal processing for obtaining an image signal  
of a second resolution which is higher than the first  
resolution from the image signal,

wherein, when said second signal processing is to  
be executed, predetermined limitation upon movement of  
25 said optical transparent member to a predetermined  
position is applied, said predetermined limitation

being not applied when said first signal processing is to be executed.

44. A computer program applied for image recording apparatus including program codes of:

5 performing image recording of an optical image of an object passed through an optical transparent member in a first resolution and in a second resolution which is higher than the first resolution; and

10 performing predetermined control in response to movement of said optical transparent member to a predetermined position when said image recording in said second resolution is to be executed, said predetermined control being not performed in said image  
15 recording when said first resolution is to be executed.

45. A computer program applied for image recording apparatus including program codes of:

performing image recording of an optical image of  
20 an object passed through an optical transparent member in a first resolution and in a second resolution which is higher than the first resolution; and

applying predetermined limitation upon movement  
25 of said optical transparent member to a predetermined position when said image recording in said second

resolution is to be executed, said predetermined limitation being not applied in said image recording when said first resolution is to be executed.

ABSTRACT OF THE DISCLOSURE

An image sensing apparatus which has an optical system, the focal length of which is variable, and an image sensing element that converts an image formed by the optical system into an electrical signal, and can sense and record a moving image and still image, includes a focal length detection circuit for detecting the focal length of the optical system, and a control unit for inhibiting recording of the still image in accordance with the focal length detected by the focal length detection circuit.

# FIG. 1

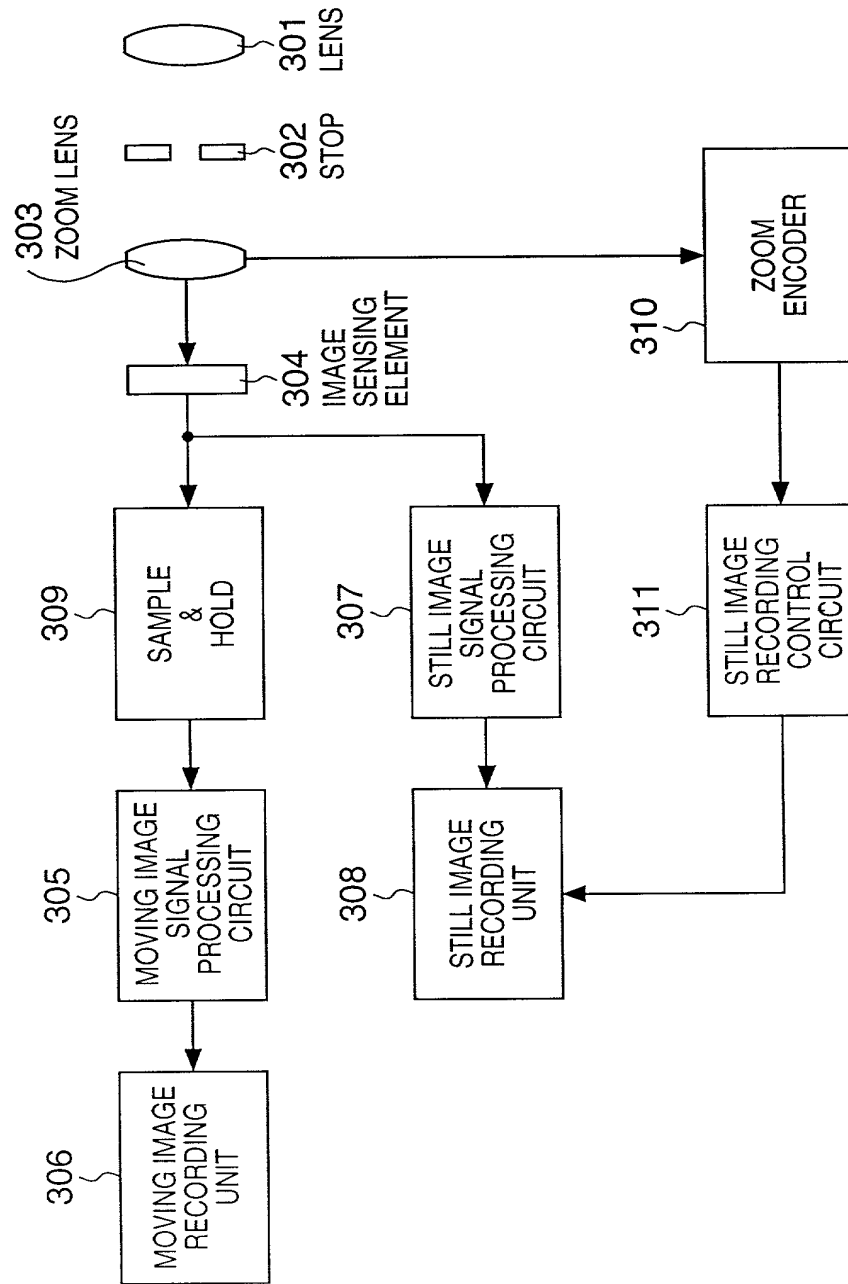
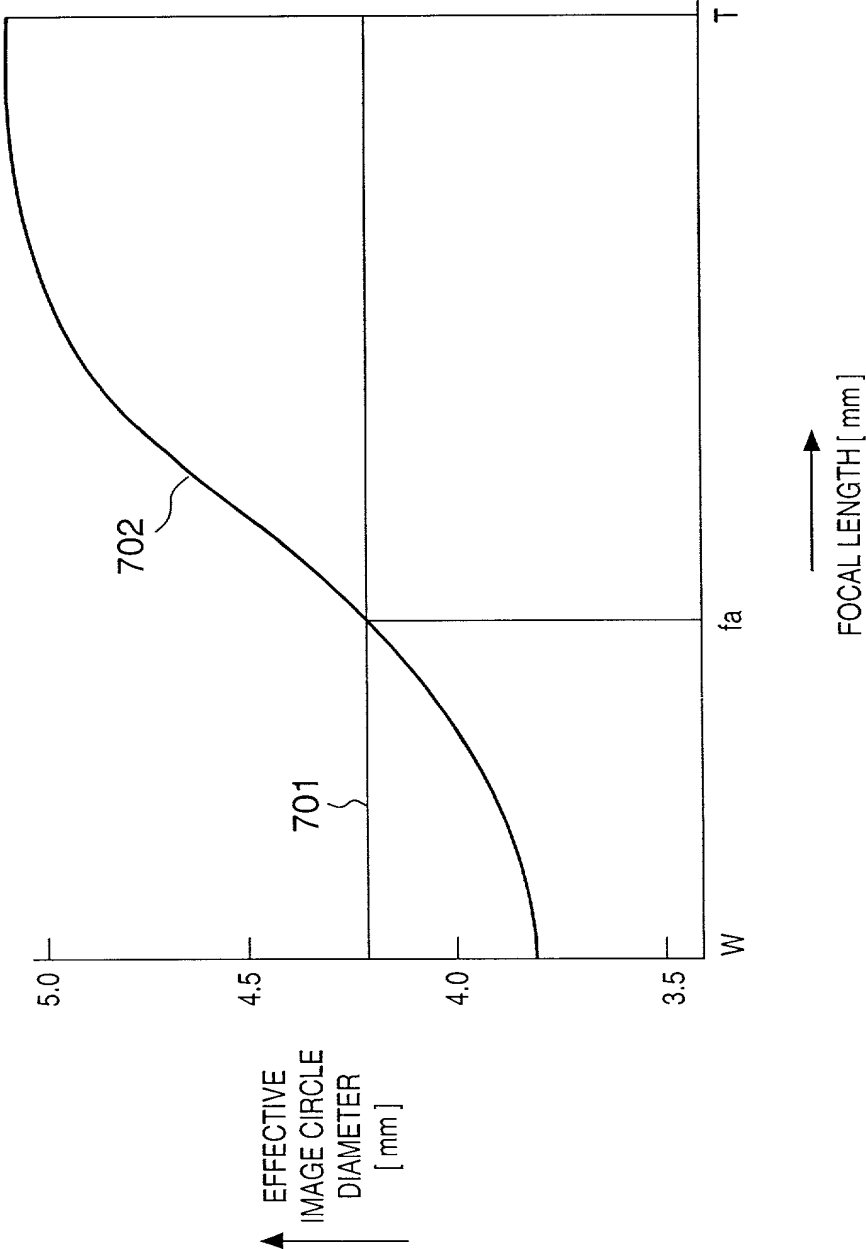
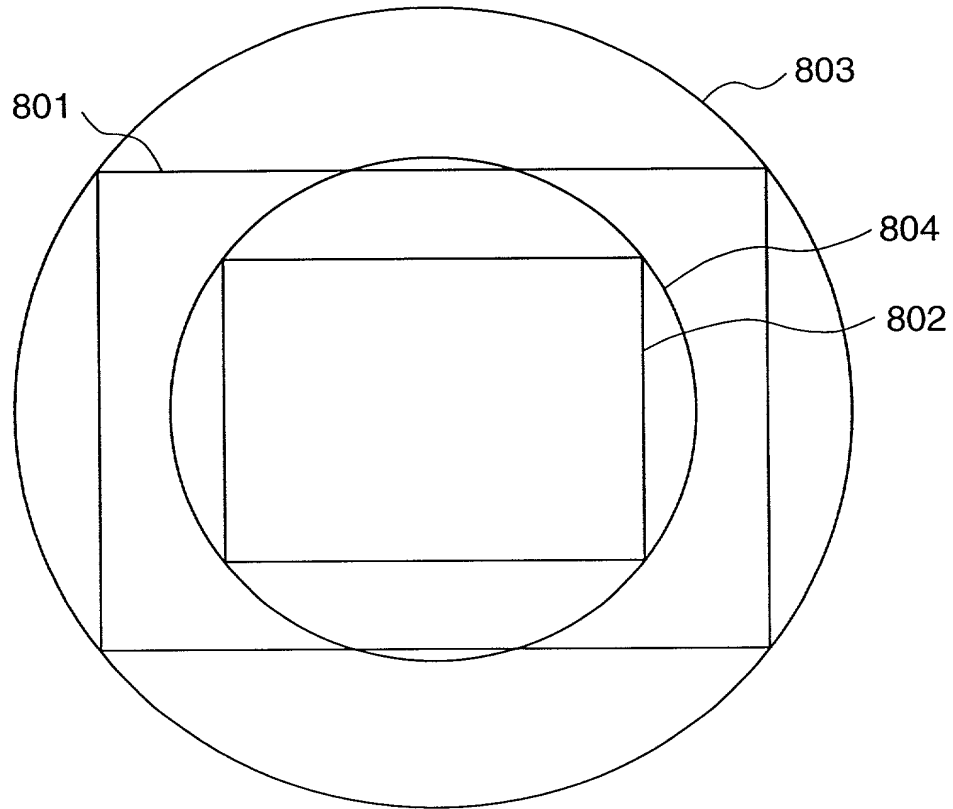


FIG. 2



**FIG. 3**



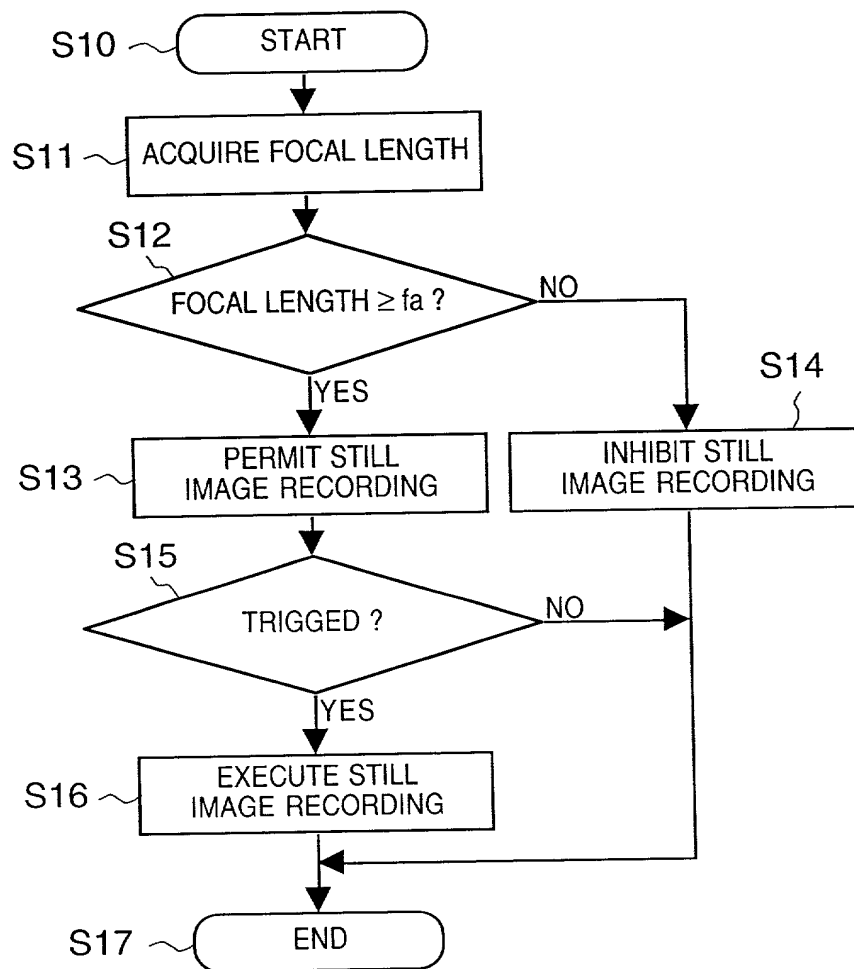
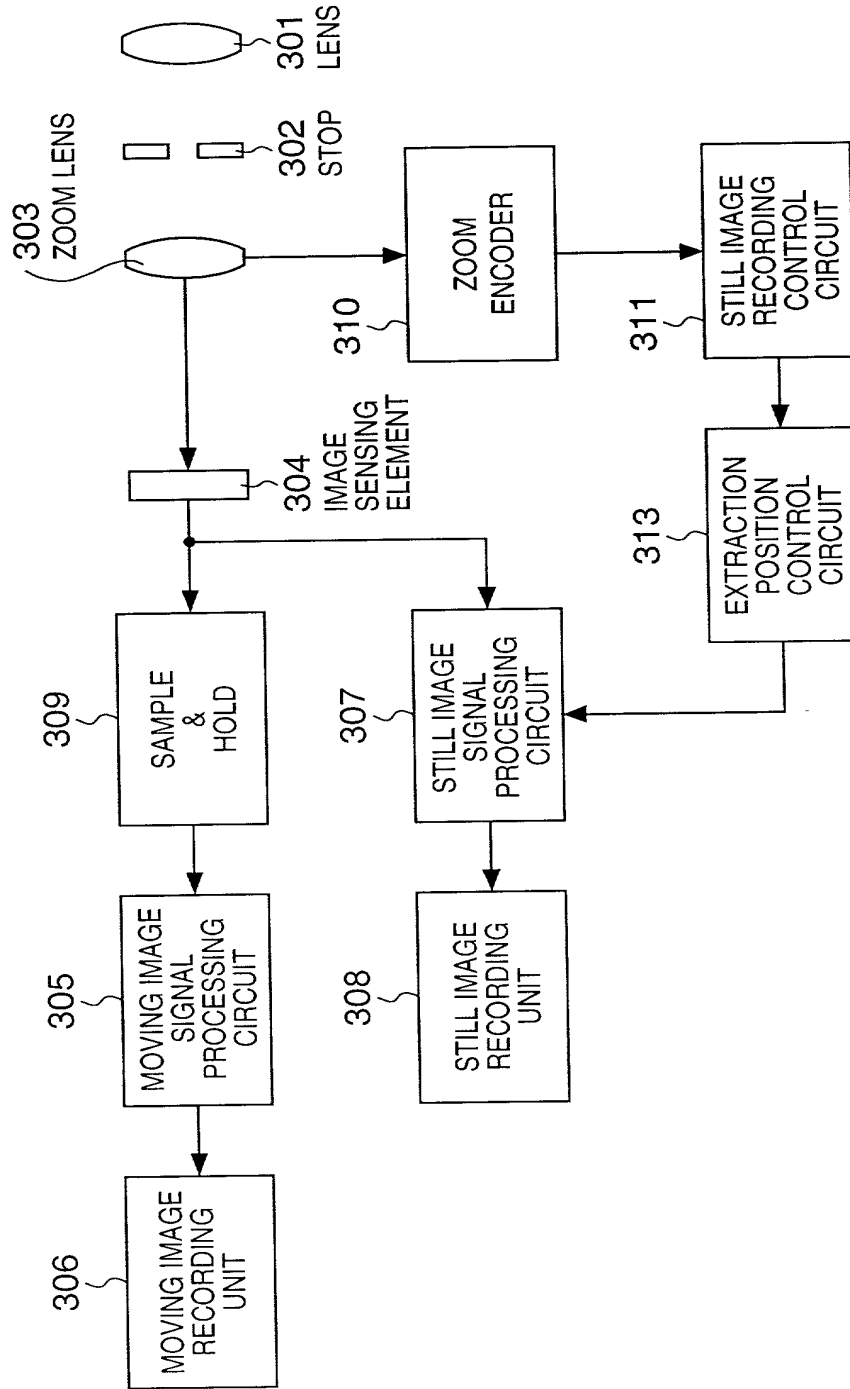
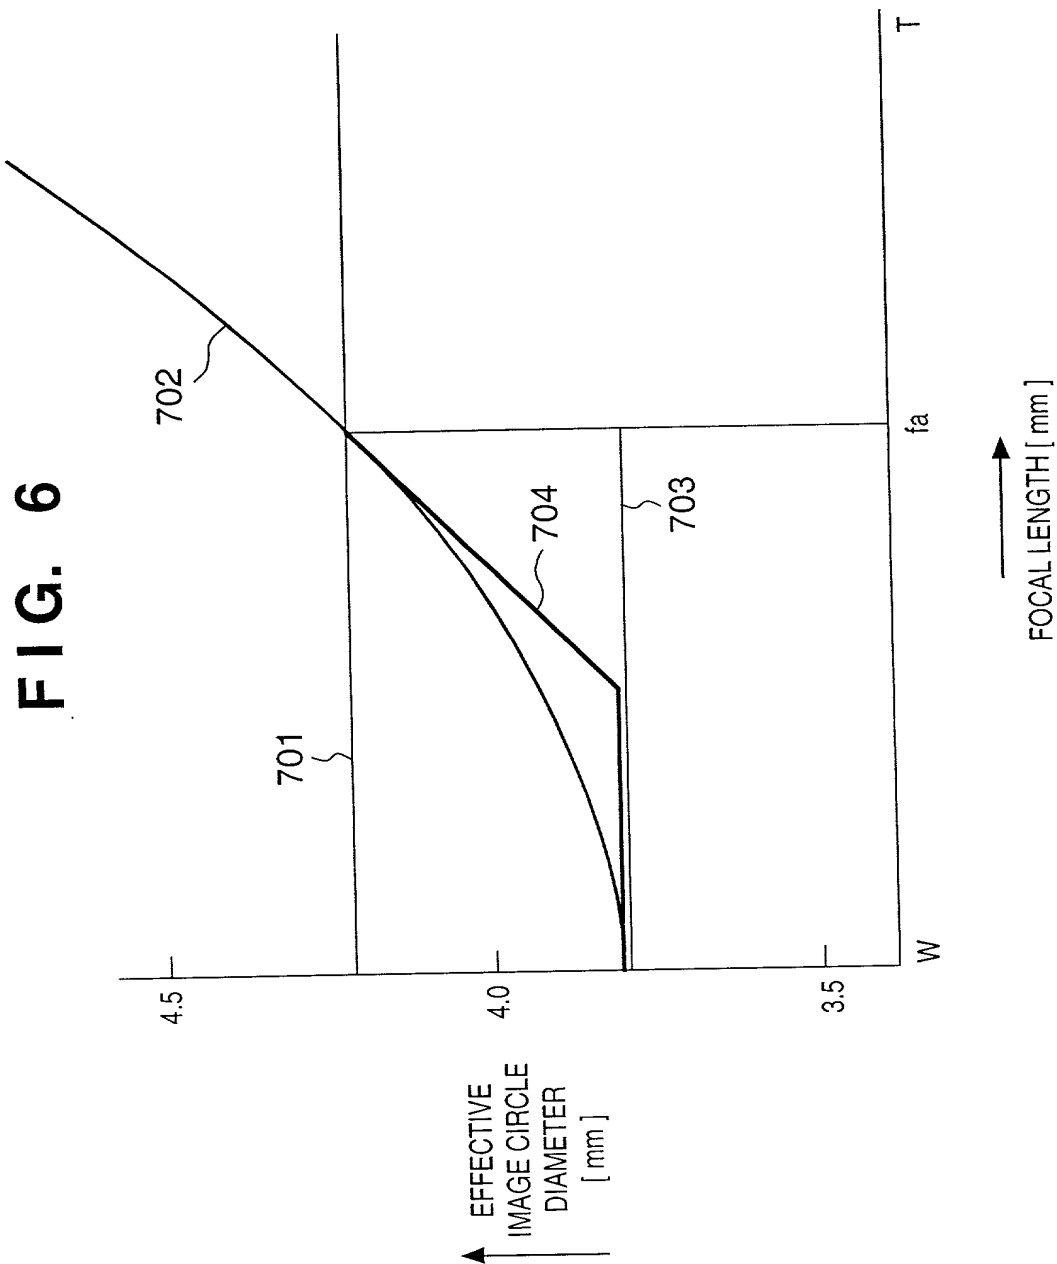
**FIG. 4**

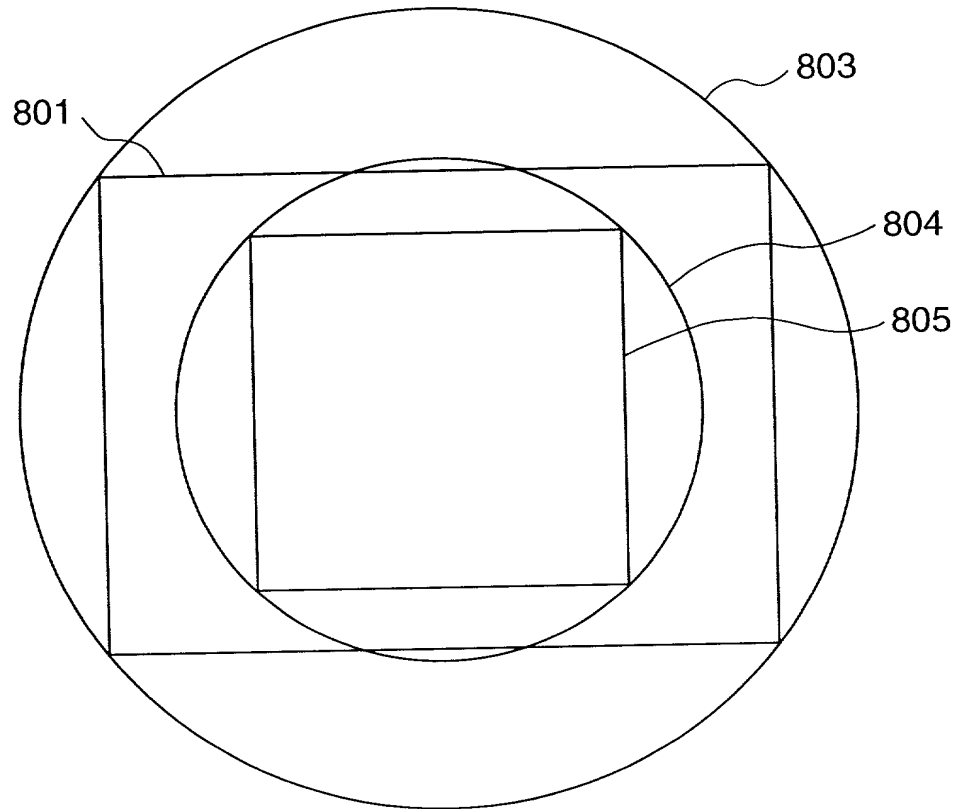


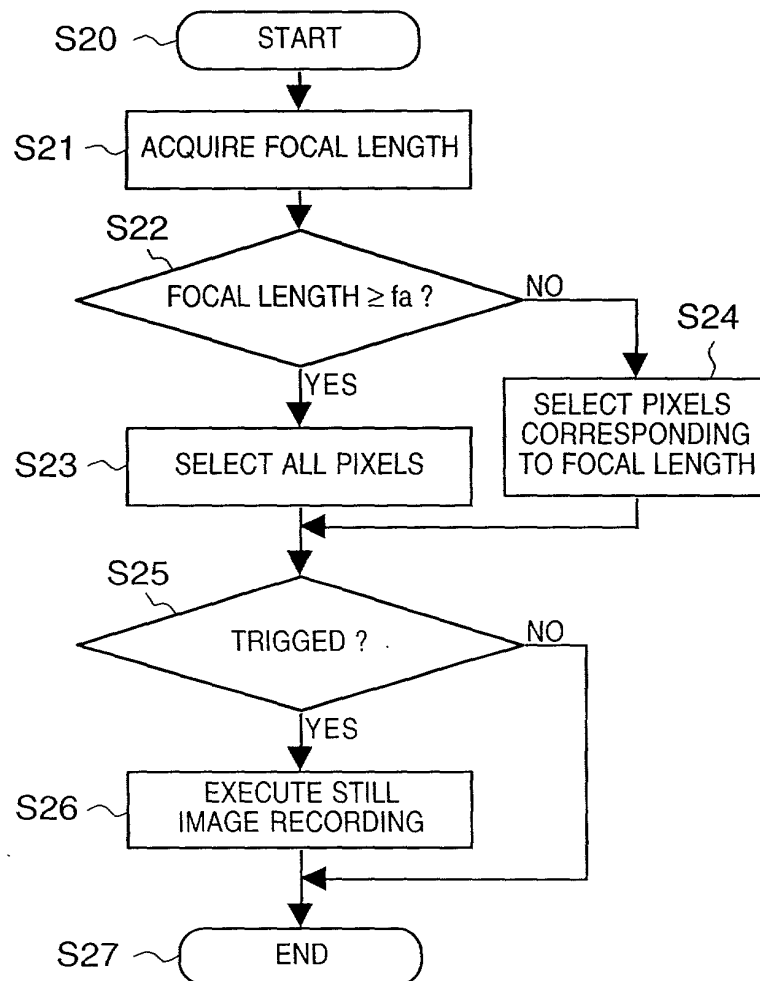
FIG. 5



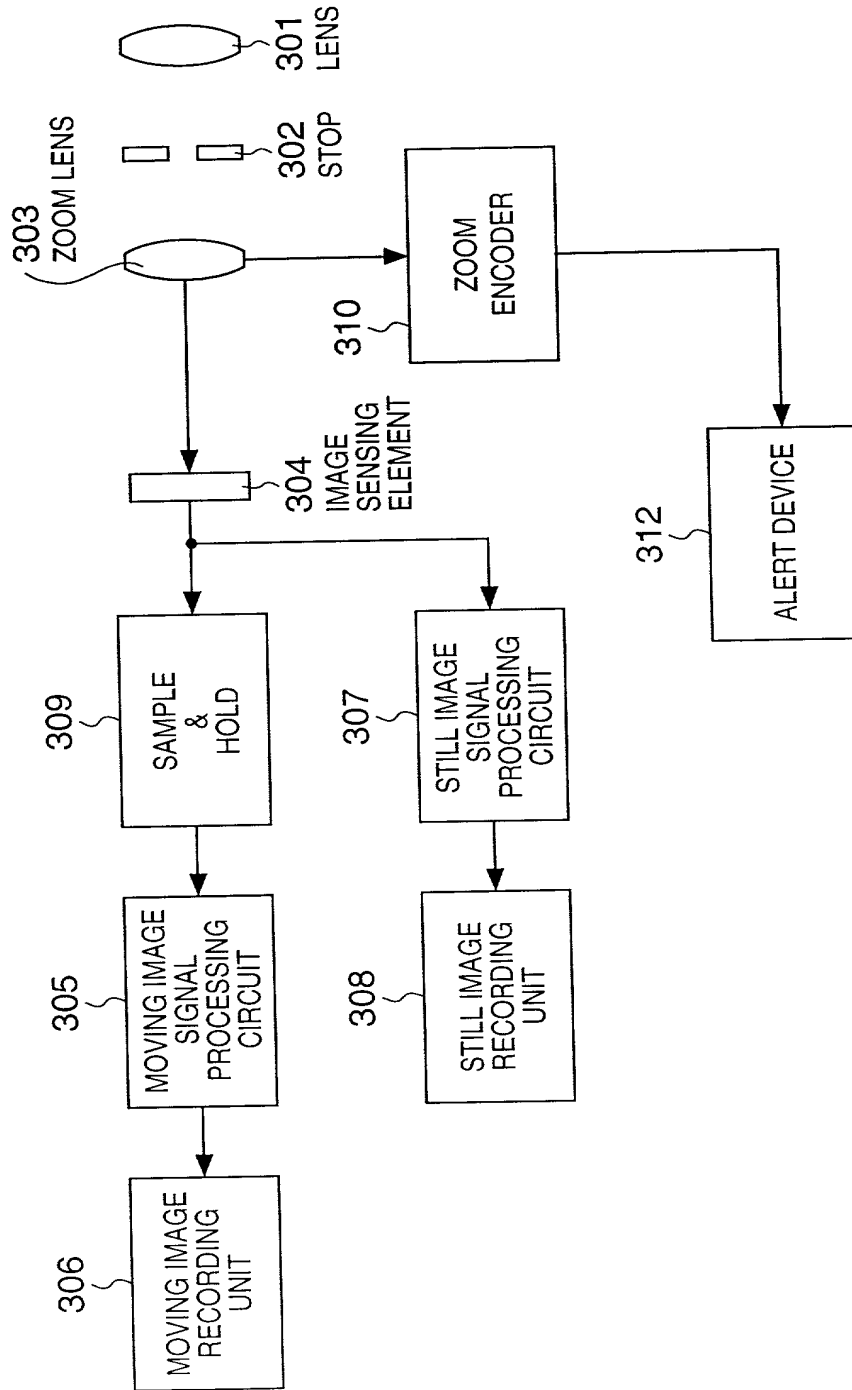


**FIG. 7**



**FIG. 8**

# FIG. 9



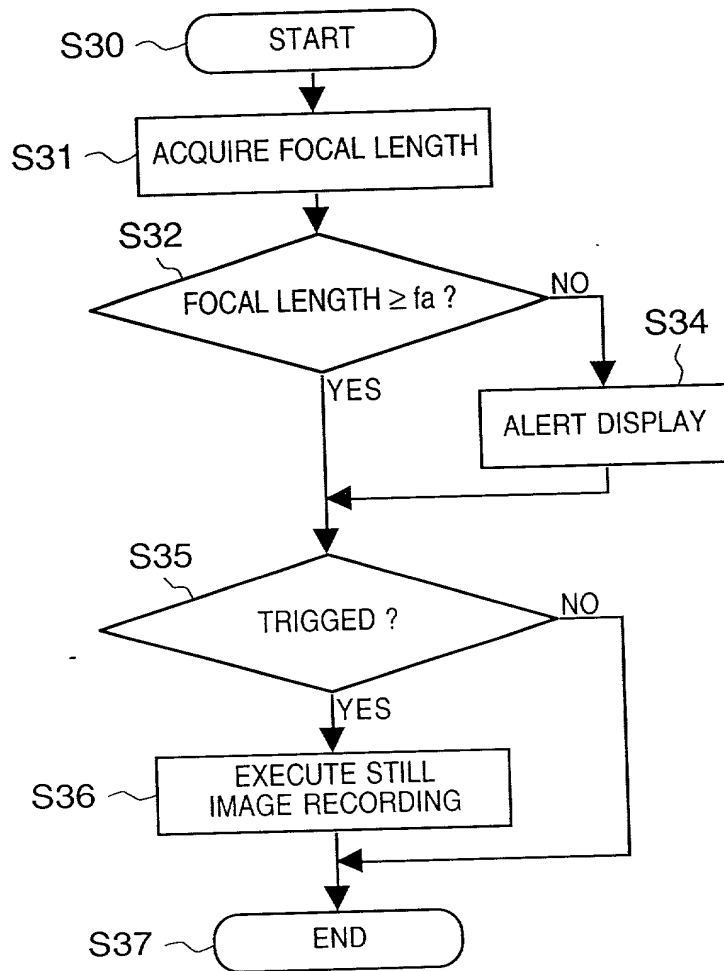
**FIG. 10**

FIG. 11

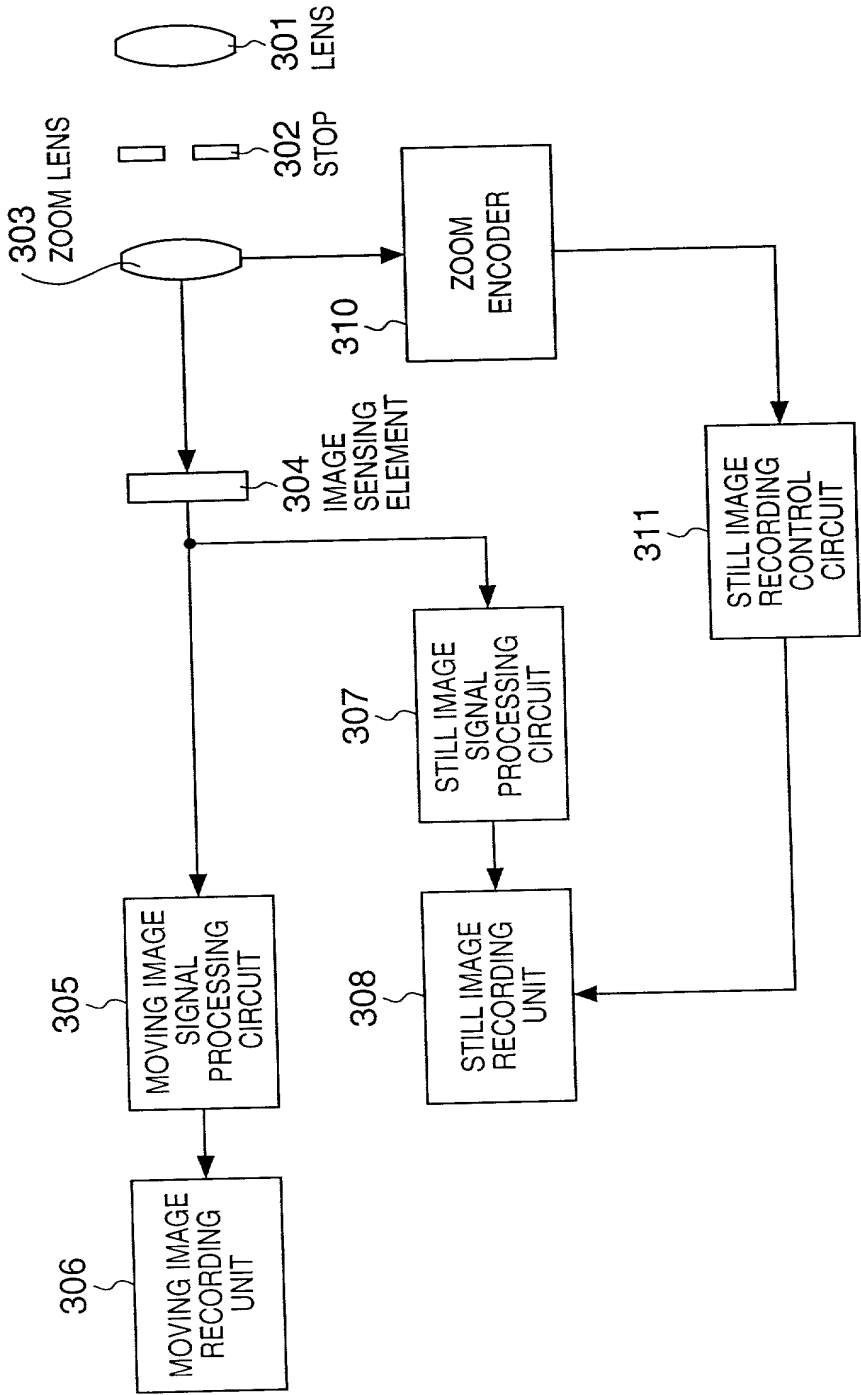
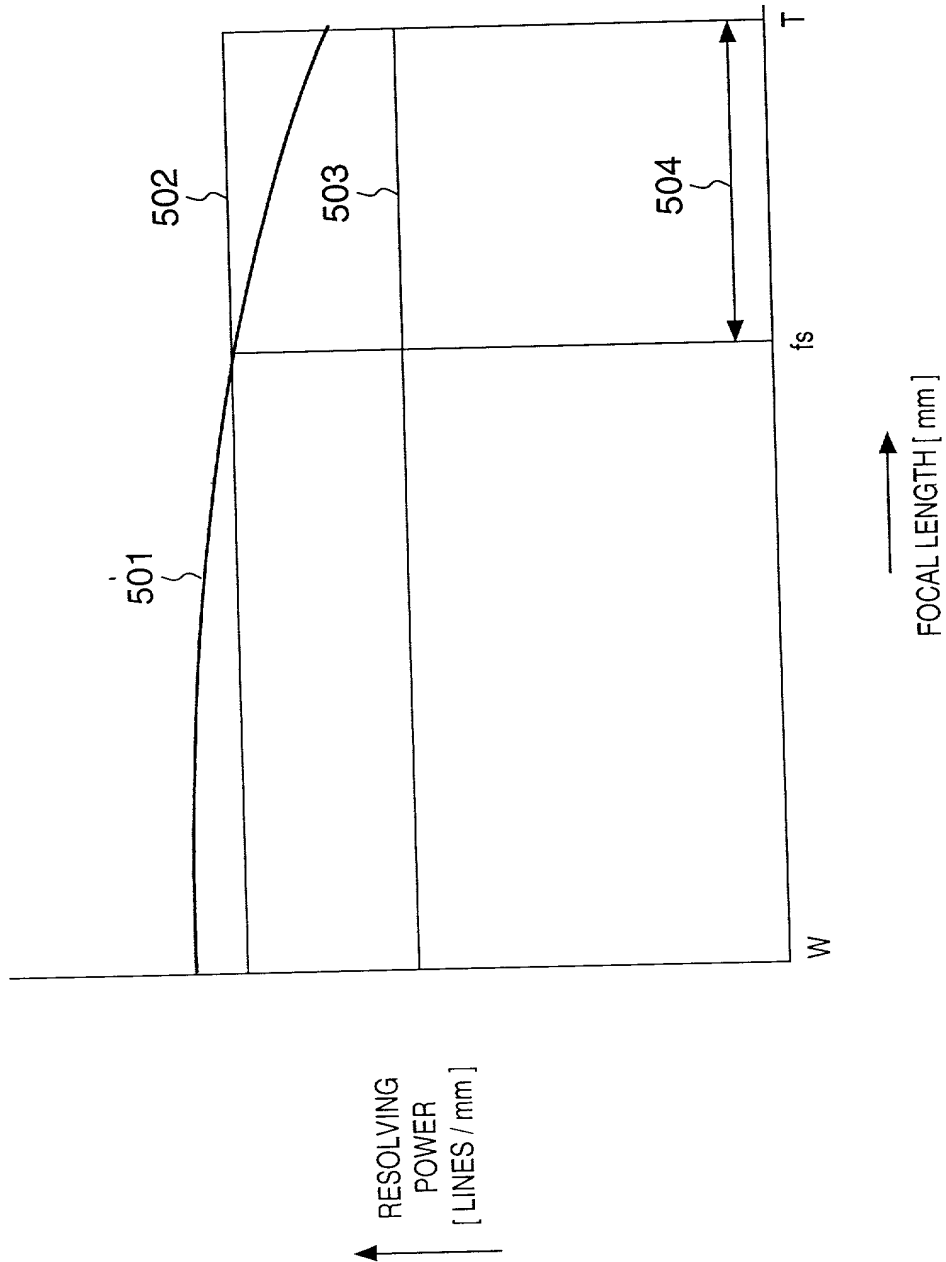


FIG. 12





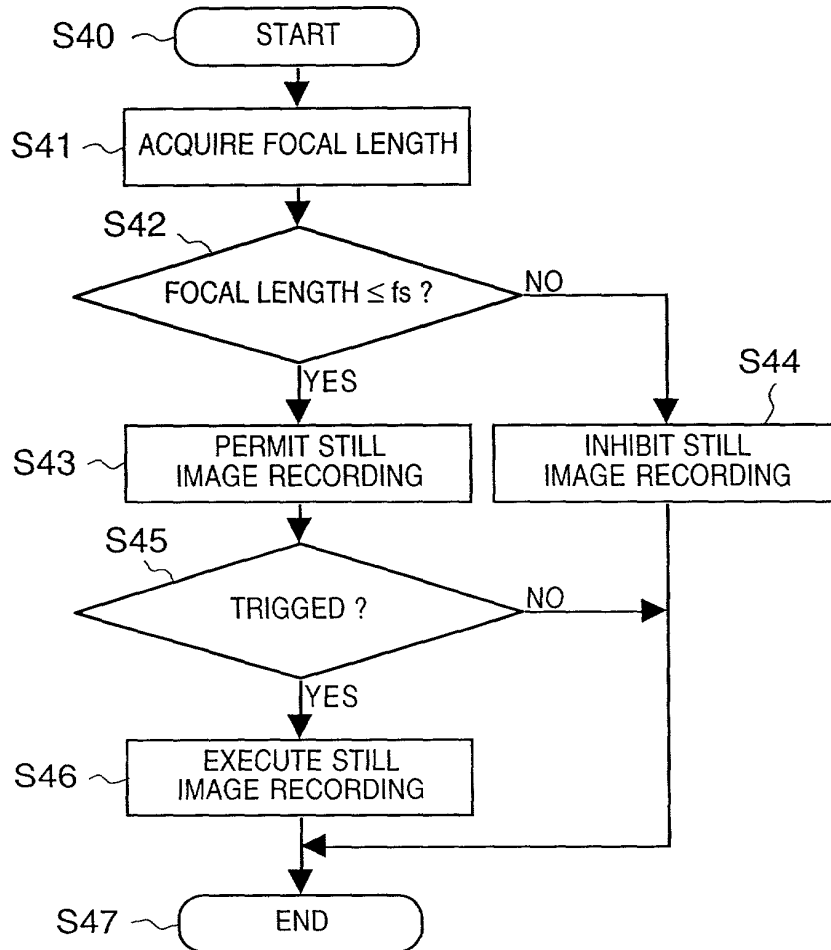
**FIG. 13**

FIG. 14

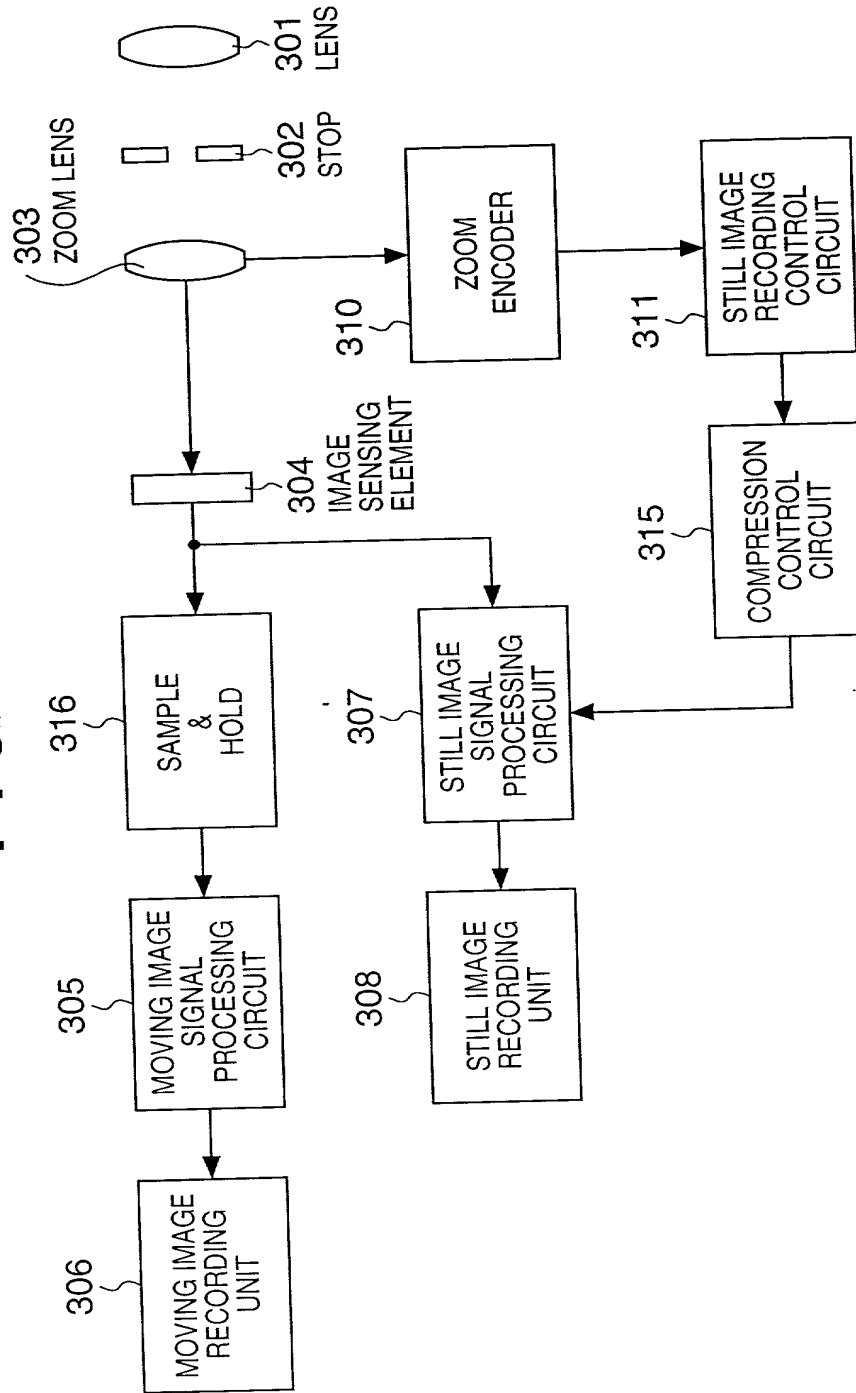


FIG. 15

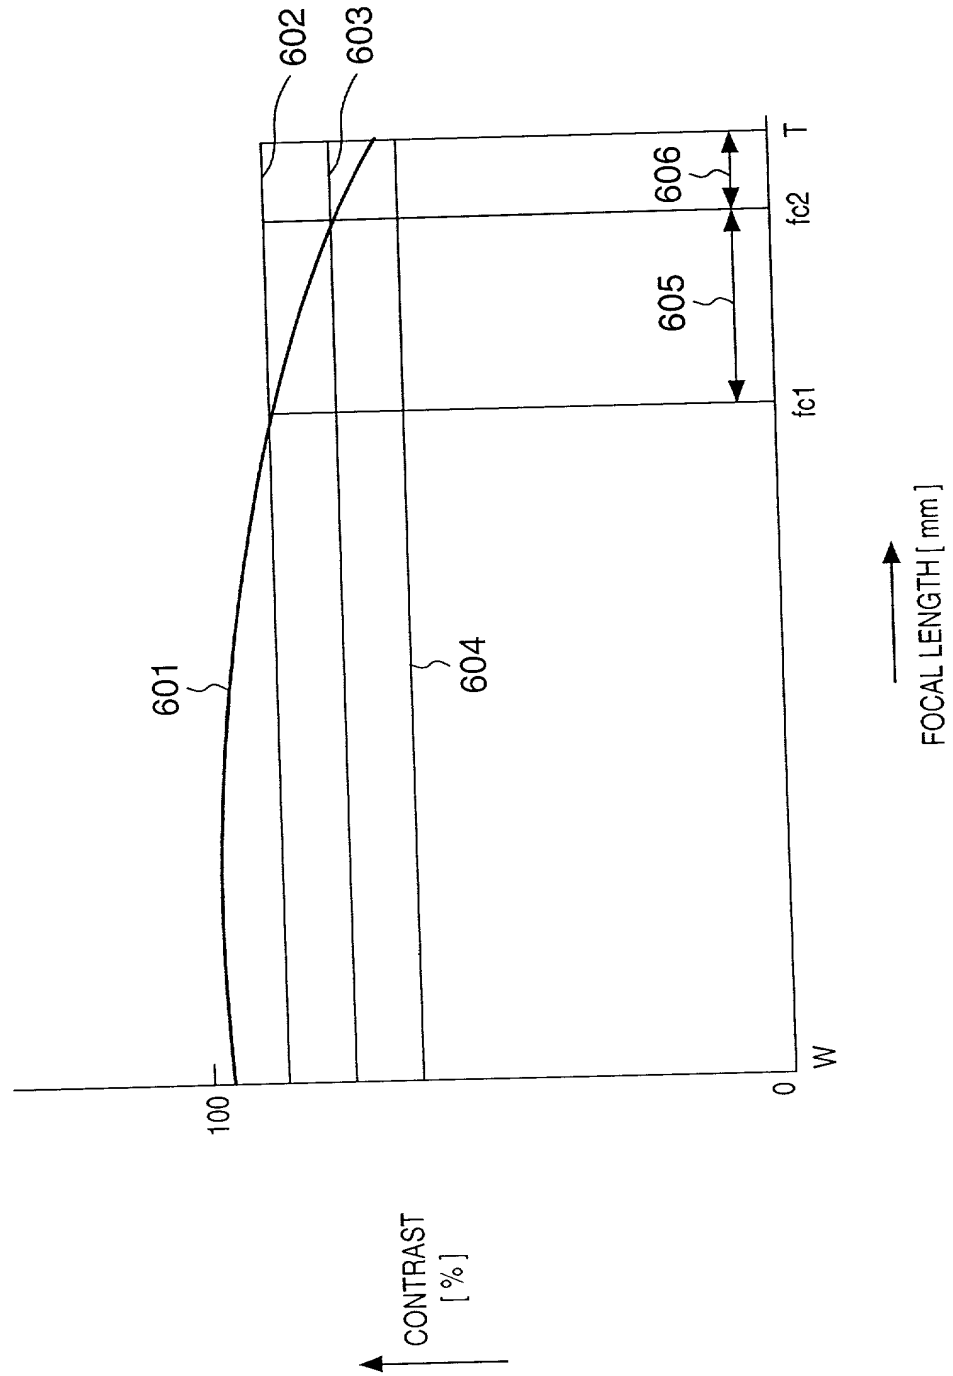


FIG. 16

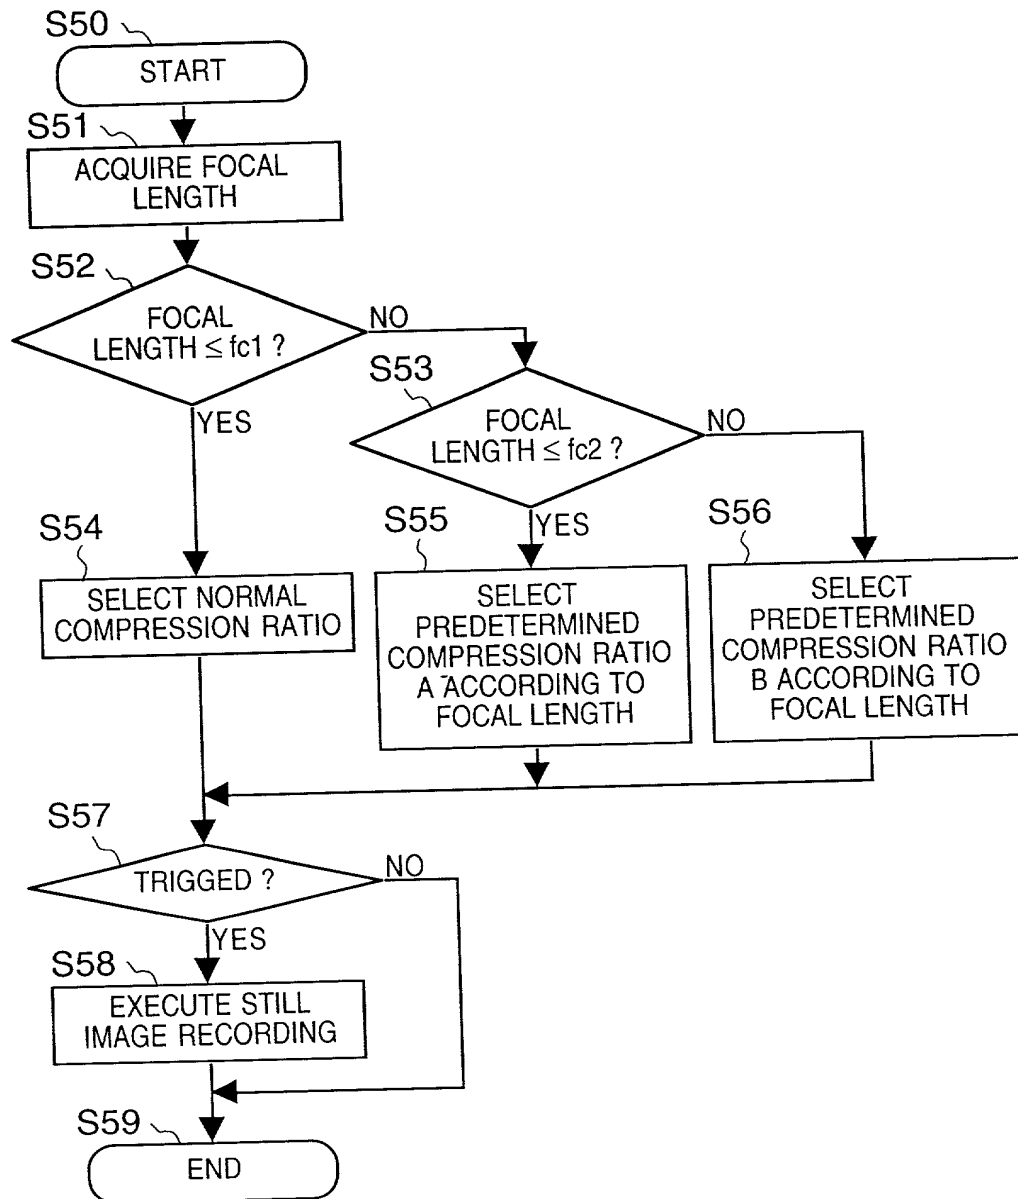


FIG. 17

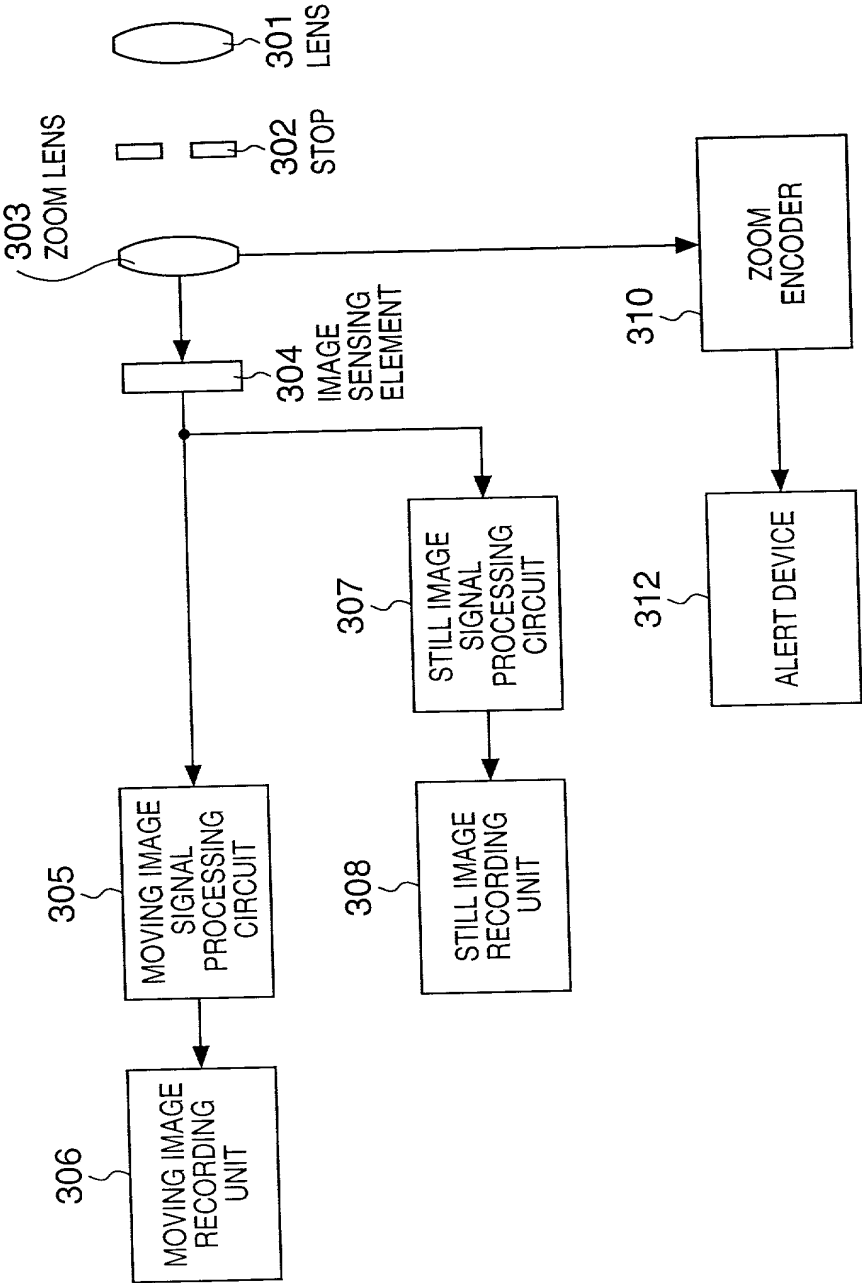


FIG. 18

